



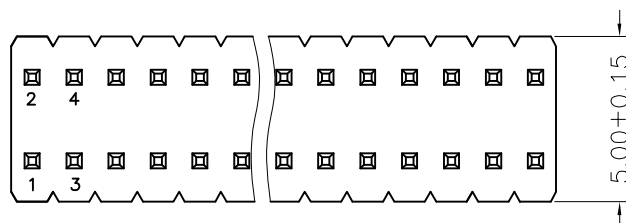

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

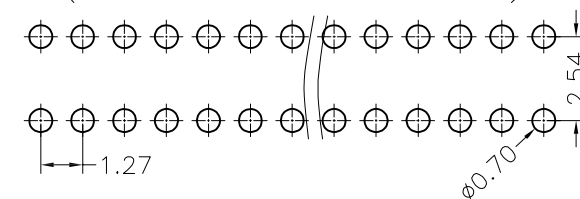

PART NUMBER CODING

PHDS25-22 XX XX X XXX

No.of Pins

1
Contact Plating

Insulator

Pin length

Packing



Series1

G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/T
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Ti
S4:15U"Gold/Ti
S5:20U"Gold/Ti
S6:30U"Gold/Ti
SN:Tin

Material/Colour
C:PA6T/Black

B=PE bag
A=Tray
T=Tube

1=Typ
2=Typ

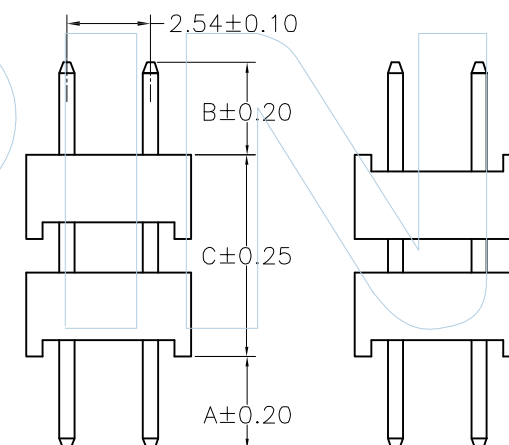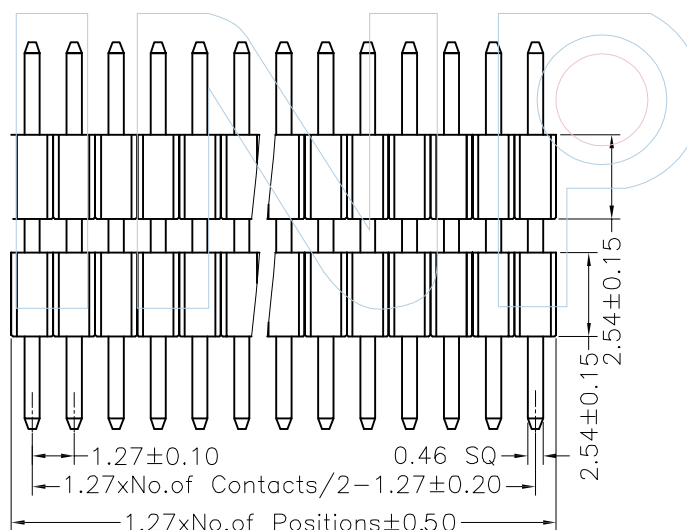

TYPE 1

TYPE 2

Dimension antitheses list			
ITEM	A	B	C
Srandard	2.80	2.80	
Alternate			



Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: PHDS25-22XXXXXXXXXX

TITLE: PH1.27X2.54 Dual ROW Double Plastic 180° H=2.54

NOTES:

Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass

Insulator Material:PA6T+30%GF(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC	
TOLERANCES ARE:	
DECIMALS	Angle
X.X:±0.40	± 3°
X.XX:±0.25	
X.XXX:±0.15	

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

5					
A0	2015/06/25	NEW	Huan.Tan	_____	Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE