



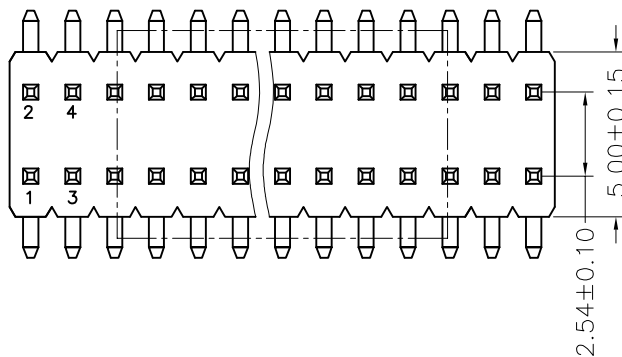

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

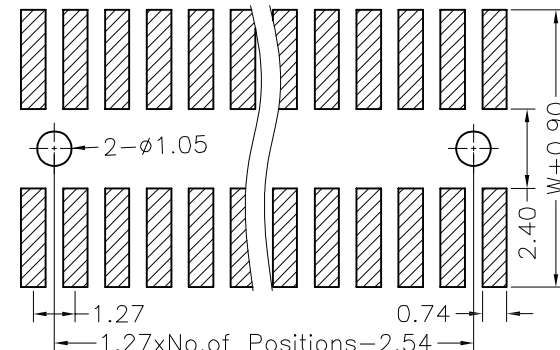

PART NUMBER CODING

PHDM25-12 XX XX X XXX X X

No. of Pins
01-50

Contact Plating
G0:Gold Flash
G1:30U"Gold
G2:50U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin



Insulator
Material/Colour
C:PA6T/Black

Pin length
L=B+D+2.5
+(W-2.54)/2

Packing
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

Series No.
1=Type1
2=Type2

Dimension antitheses list			
ITEM	B	D	W
Srandard	6.00	0.3	7.5
Alternate			

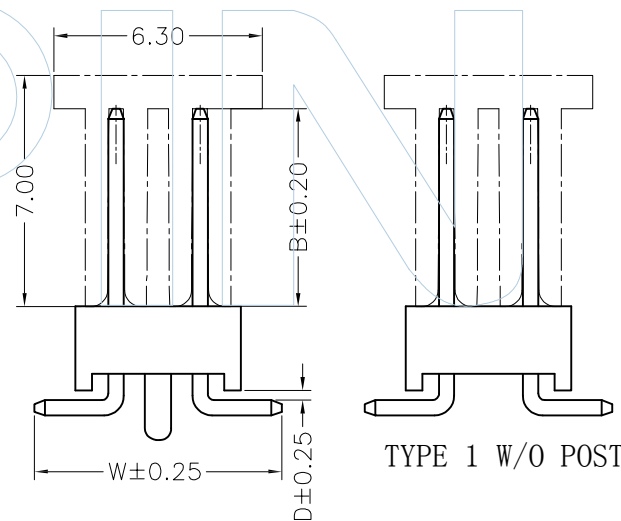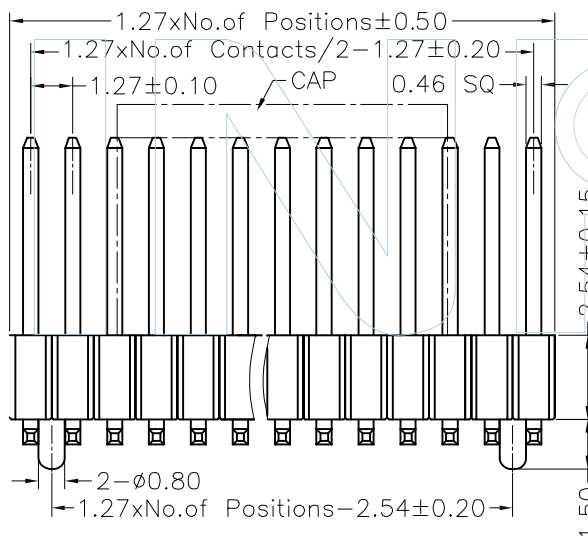

TYPE 2 WITH POST

TYPE 1 W/O POST



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

PART NO: PHDM25-12XXXXXXXXXX

TITLE: PH1.27X2.54 Dual ROW SMT H=2.5

NOTES:

Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au or Sn over Ni

Insulator Material:PA6T+30%GF(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE