




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



PART NUMBER CODING

PHER20-11 XX XX X XXX X 1




No. of Pins
01-50

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin

Insulator
Material/Colour
A: PBT/Black
C: PA6T/Black

Pin length(short)
L=A+B++D+3.0

Packing
B=PE Bag
T=Tube

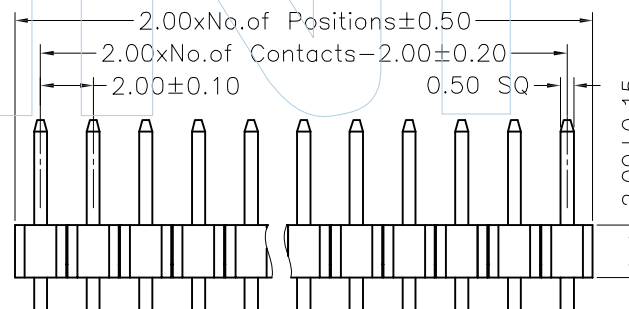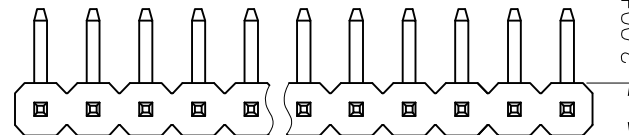

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: PHER20-11XXXXXXXXX1

TITLE: 2.00mm SINGLE ROW 90°H=2.00 CONCAVE BENDINC

NOTES:
Current Rating: 1.5AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA6T OR
PBT+30%GF(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE