HSF Pb RoHS

Recommended P.C.B Loyout(Top Side)
(PCB BOARD TOL ERANCE±0.05)

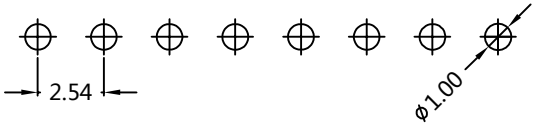

PART NUMBER CODING

MFFR70-1 XX XX X 124 X 1

- XX — No.of Pins: 02-40pin
- XX — Contact Plating: G0:Gold Flash; G1:3U"Gold; G2:5U"Gold; G3:10U"Gold; G4:15U"Gold; G5:20U"Gold; G6:30U"Gold; S0:Gold Flash/Tin; S1:3U"Gold/Tin; S2:5U"Gold/Tin; S3:10U"Gold/Tin; S4:15U"Gold/Tin; S5:20U"Gold/Tin; S6:30U"Gold/Tin; SN:Tin
- X — Insulator Material/Colour: A:PPS/Black
- X — Packing: A:Tray; B:PE Bag; T:Tube

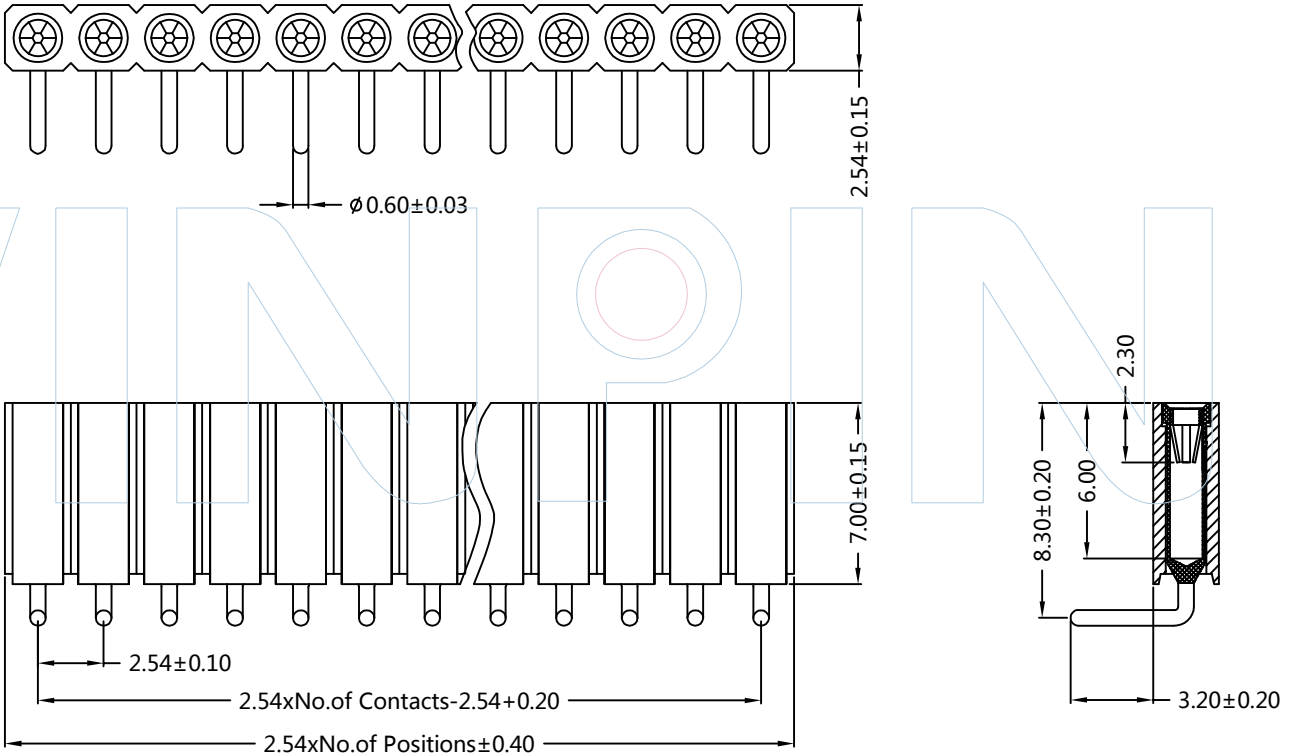

WINPIN

WINPIN
Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: MFFR70-1XXXXX124X1

TITLE: 2.54mm Machined Female Header 90° H=7.00 L=12.43mm

NOTES:
Current Rating:3.0AMP
Insulation Resistance:10MΩ Min
Withstand Voltage:1000V AC/DC
Mechanical Life:Min 500 cycles
Connecting Pin:ø0.60mm
Operation TeMFerature:-40℃ to +105℃

Material
Sleeve:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PPS(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Huan.Tan	———	Huan.Tan