


PART NUMBER CODING


PHAM14-12 XX XX X XXX X X

- No. of Pins: 01-50
- Contact Plating:
 - G0: Gold Flash
 - G1: 3U" Gold
 - G2: 5U" Gold
 - G3: 10U" Gold
 - G4: 15U" Gold
 - G5: 20U" Gold
 - G6: 30U" Gold
 - S0: Gold Flash/Tin
 - S1: 3U" Gold/Tin
 - S2: 5U" Gold/Tin
 - S3: 10U" Gold/Tin
 - S4: 15U" Gold/Tin
 - S5: 20U" Gold/Tin
 - S6: 30U" Gold/Tin
 - SN: Tin
- Insulator Material/Colour: D:LCP/Black
- Pin length(short): L=B+H-0.3+(W-1.2)/2
- Packing:
 - A=Tray
 - T=Tube
 - P=Tube+CAP
 - R=Tape&Reel+CAP
- Series:
 - 1=TYPE1
 - 2=TYPE2

Dimension antitheses list			
ITEM	B	W	H
Standard	2.8	4.6	1.8
Alternate			

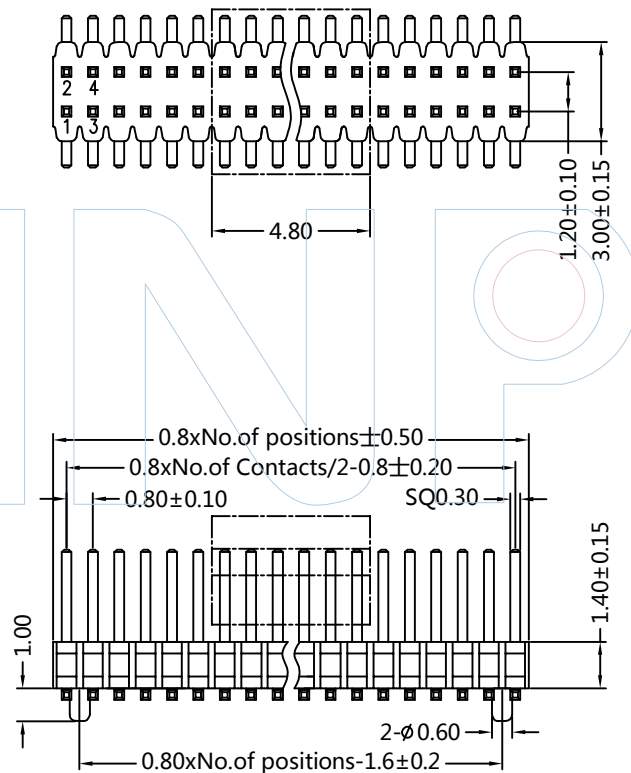

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

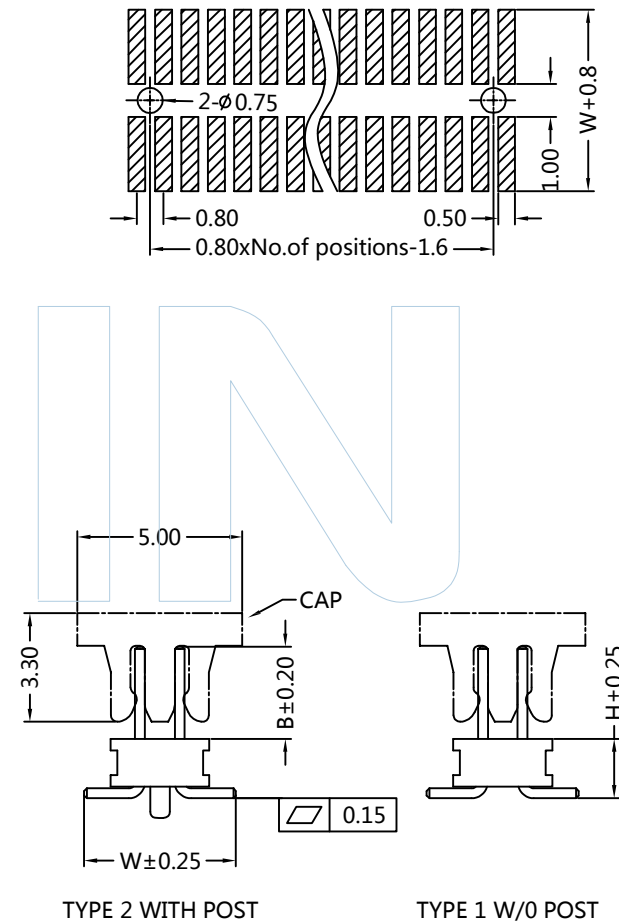

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net


PART NO: PHAM14-12XXXXXXXXXX

TITLE: PH0.8x1.2 Dual Row 180°SMT H=1.4mm

NOTES:
Current Rating:0.75AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:LCP+30%GF(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ. 
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE