


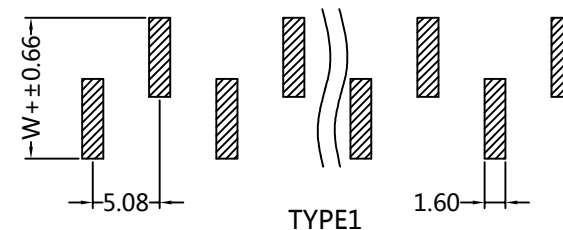
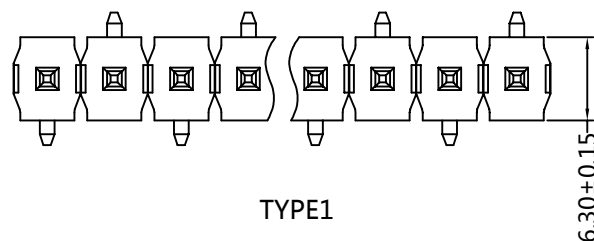

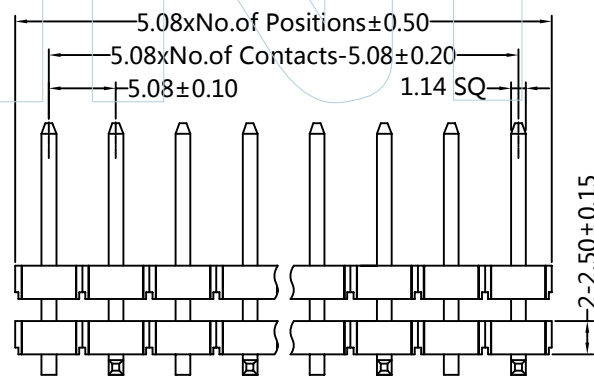


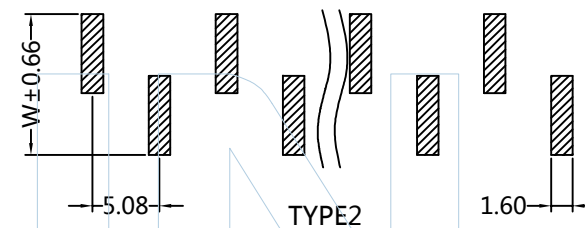

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

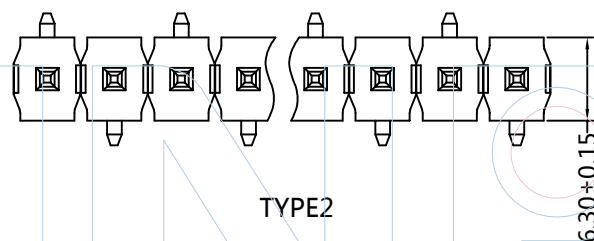

PART NUMBER CODING

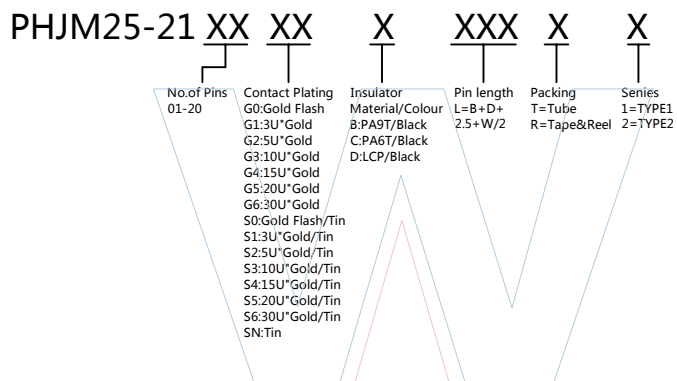

Dimension antitheses list				
ITEM	B	D	W	
Standard	11.5	0.45	10.0	
Alternate				



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: PHJM25-21XXXXXXXXXX

TITLE: PH 5.08mm Single ROW 180°SMT H=2.5 Double Plastic

NOTES:
Current Rating:7.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T/LCP+30%GF
(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE