



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)





PART NUMBER CODING

BHFS08-XX XX 1 X X 1

No. of Pins 6-64P	Contact Plating G0:Gold Flash G1:3U*Gold G2:5U*Gold G3:10U*Gold G4:15U*Gold G5:20U*Gold G6:30U*Gold S0:Gold Flash/Tin S1:3U*Gold/Tin S2:5U*Gold/Tin S3:10U*Gold/Tin S4:15U*Gold/Tin S5:20U*Gold/Tin S6:30U*Gold/Tin SN:Tin	Material/Color A:PBT/Black B:PA9T/Black C:PA6T/Black	Packing A:Tray B:PE Bag T:Tube R:Tape&Reel
----------------------	---	---	--

PIN	NOTCH
6~8P	--
10P	C
14~64P	ACDE

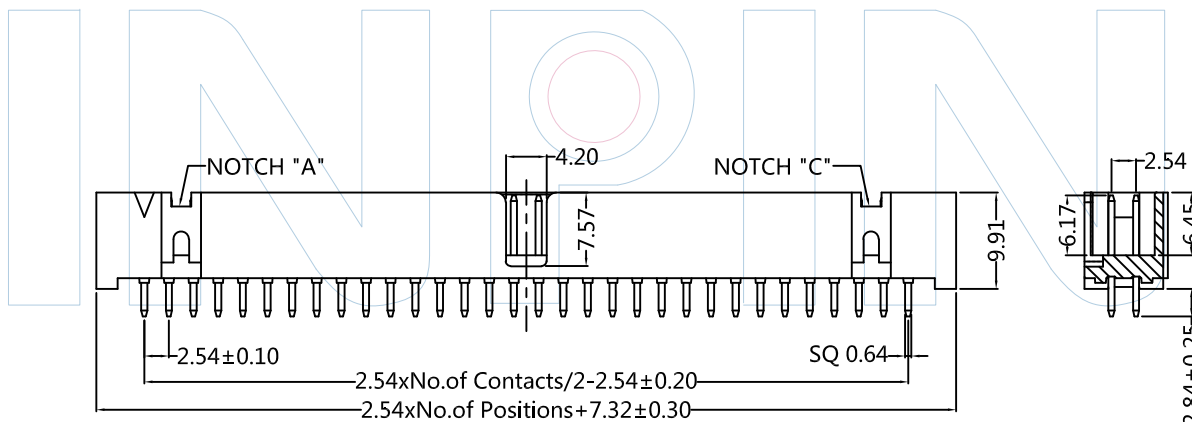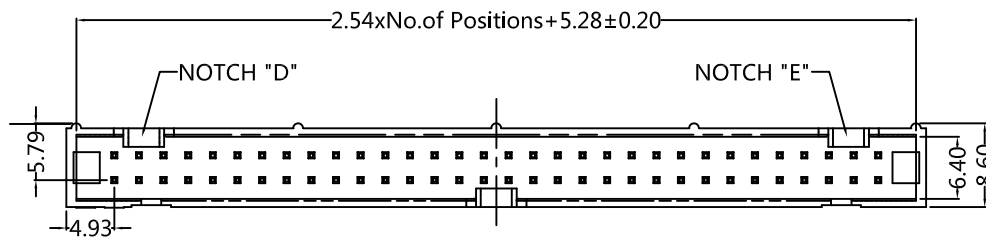

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: BHFS08-XXXX1XX1

TITLE: 2.54mm Box Header 180° H=9.91

NOTES:
Current Rating: 3.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

MATERIAL:
Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT/PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2021/12/13	NEW	GF.He	Andy	
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE