

PART NUMBER CODING

PHBM10-11 XX XX X XXX X X

No. of Pins
01-50

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin




Insulator
Material/Colour
B: PA9T/Black
C: PA6T/Black

Pin length
L=B+D+
1.0+W/2

Packing
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP


SeriesNo
1=Type1
2=Type2

Dimension antitheses list			
ITEM	B	D	W
Standard	2.00	0.70	3.00
Alternate			

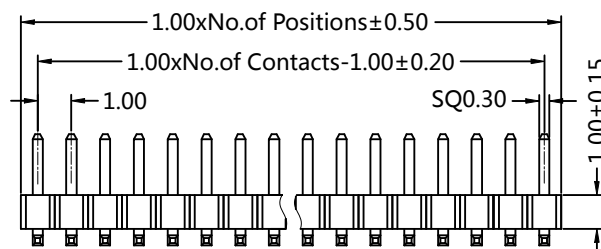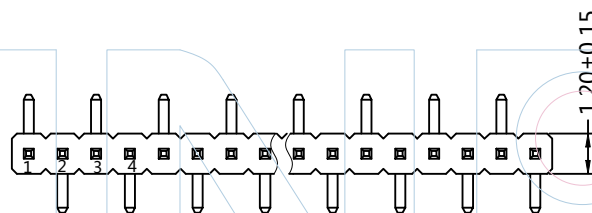
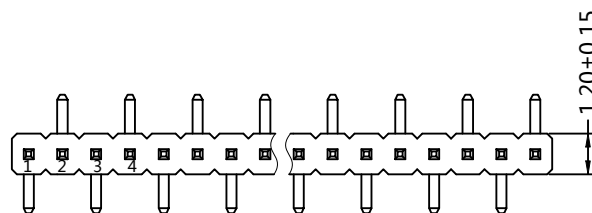


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

TYPE 1

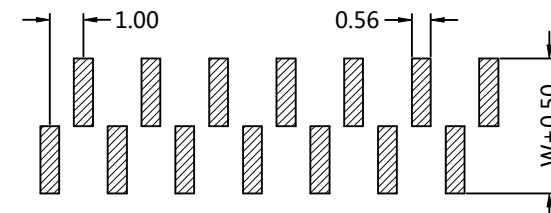

TYPE 2

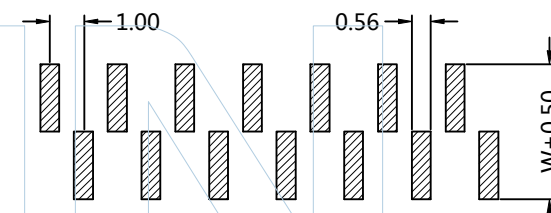

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHBM10-11XXXXXXXXXX

TITLE: PH 1.0mm Single Row 180°SMT H=1.00mm

NOTES:
Current Rating: 0.75AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ. 
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE