
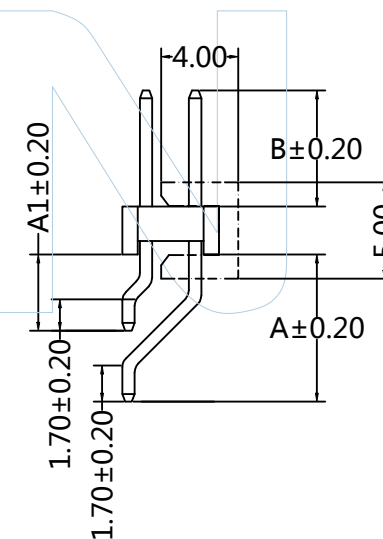
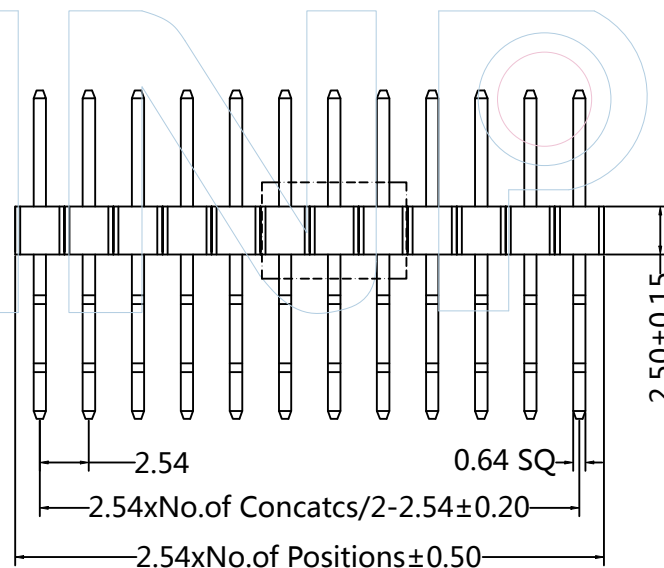


PHFZ25-12 XX XX X XXX X 1

No. of Pins 01-40	Contact Plating	Insulator Material/Colour	Pin length $L = A + B + 2.5 + 0.3$	Packing
G0:Gold Flash	G1:3U" Gold	B:PA97/Black		B=PE Bag
G2:5U" Gold	G3:10U" Gold	C:PA6T/Black		T=Tube
G4:15U" Gold	G5:20U" Gold			P=Tube+CAP
G6:30U" Gold	S0:Gold Flash/Tin			R=Tape&Reel+CAP
S1:3U" Gold/Tin	S2:5U" Gold/Tin			
S3:10U" Gold/Tin	S4:15U" Gold/Tin			
S5:20U" Gold/Tin	S6:30U" Gold/Tin			
SN:Tin				

Dimension antitheses list			
ITEM	A	A1	B
Srandard	7.62	3.94	6.00
Alternate			

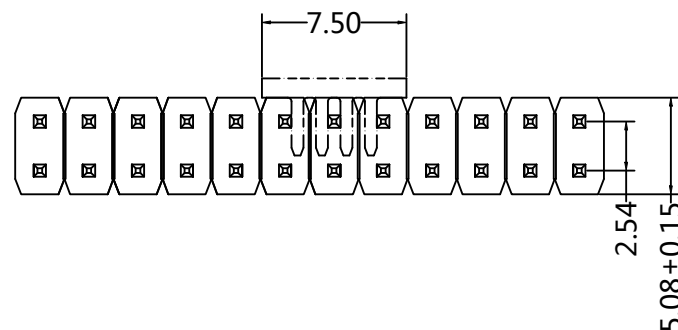

FAX:+86 769 81766192
Http:www.winpin.net

TITLE: PH 2.54mm Dual Row 90°SMT H=2.5mm

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

IS						
	A0	2022/10/27	NEW	GF.He	_____	Andy
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE