

PART NUMBER CODING

PHBM15-22 XX XX X XXX X X

No. of Pins
01-50


Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin

Insulator Material/Colour
B: PA9T/Black
C: PA6T/Black



Pin length (short)
 $L = B + H + C$
 $+(W - 1.0)/2$

Packing
A = Tray
T = Tube
P = Tube + CAP
R = Tape & Reel + CAP

Series No.
1 = Type1
2 = Type2

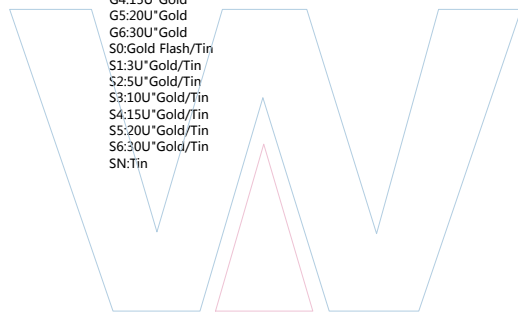

Dimension antitheses list				
ITEM	B	C	D	W
Standard	1.90	14.70	0.00	5.20
Alternate				

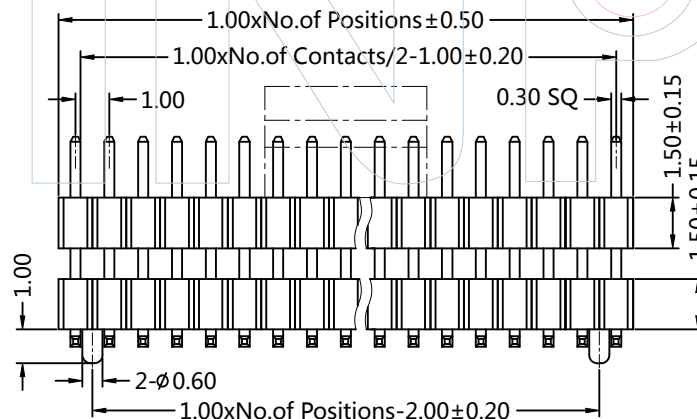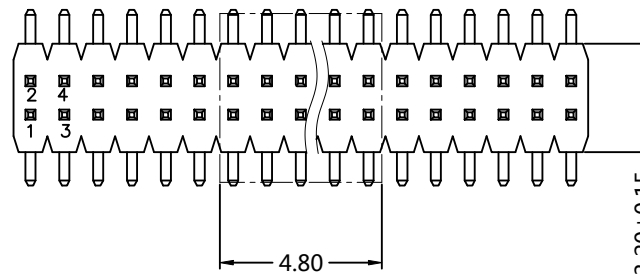

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE ±0.05)

