

PART NUMBER CODING

PHBM10-12 XX XX X XXX X X

No. of Pins
01-50

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin


Insulator
Material/Colour
B: PA9T/Black
C: PA6T/Black

Pin length
L=B+D+
1.0+(W-1.0)/2

Packing
T= Tube
P= Tube+CAP
R= Tape&Reel+CAP

Series No
3=Type1
4=Type2

Dimension antitheses list			
ITEM	B	D	W
Standard	1.80	0.20	5.20
Alternate			

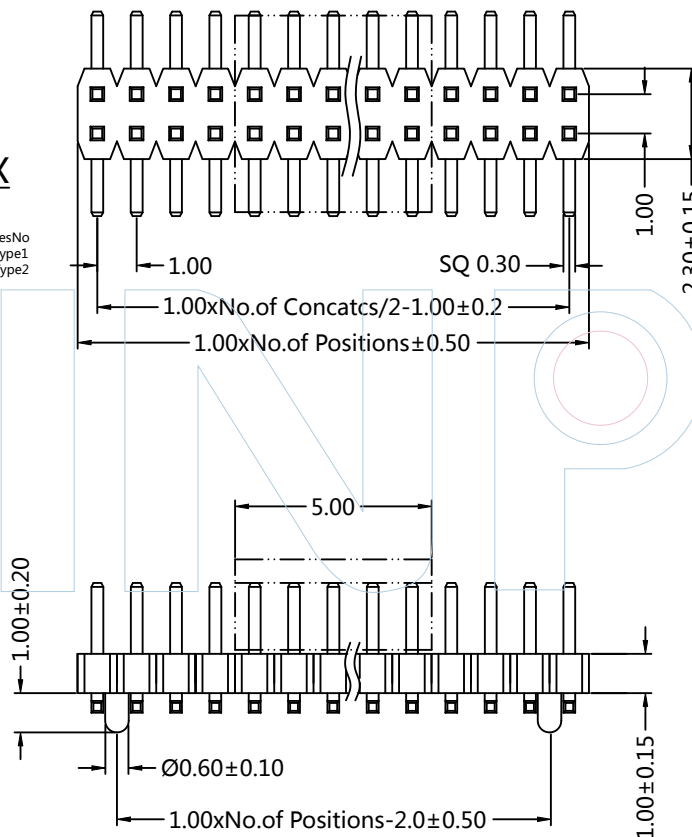

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ± 0.05)

