




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



PART NUMBER CODING


FHCS44- 1 XX XX X U X 1-1

No.of Pins
Row:02-50Pin


Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S5:20U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin

Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black


Packing
A=Tray
T=Tube
P=Tube+Cap



2.10 ± 0.15

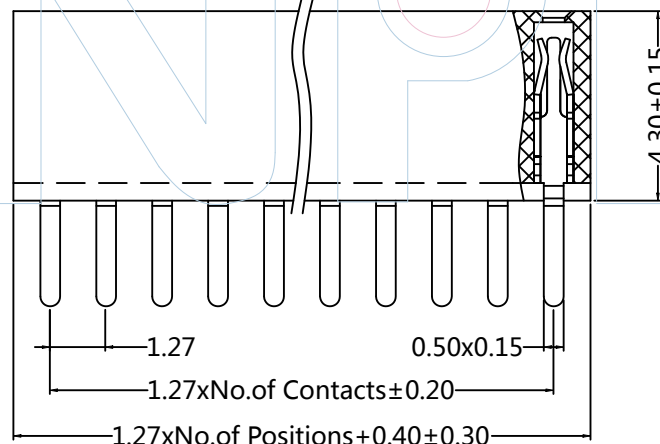

4.30 ± 0.15



2.40 ± 0.25



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: FHCS44-1XXXXXUX1-1

TITLE: FH1.27mm Single Female 180° H=4.30mm

NOTES:
Current Rating:1.0AMP
Contact Resistance:20m Ω Max
Insulation Resistance:1000M Ω Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Phosphor Bronze
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2022/06/09	NEW	GF.He		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE