

PART NUMBER CODING

IDD1 X- XX XX X X X X

Type 1:With Bump
2:w/o Bump

No.of Pins 6-64P






Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Ni
S1:3U"Gold/Ni
S2:5U"Gold/Ni
S3:10U"Gold/Ni
S4:15U"Gold/Ni
S5:20U"Gold/Ni
S6:30U"Gold/Ni
Ni/Ni

Color
B:Black
G:Grey

Type 2:W/O SR
3:With SR 1
4:With SR 2
5:With SR 3





Packing A:Tray

Series 4:Type 1
5:Type 2
6:Type 3

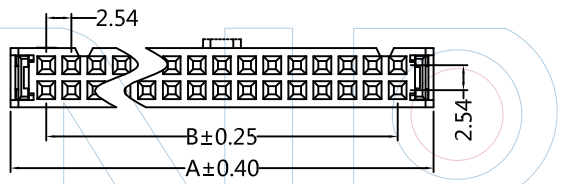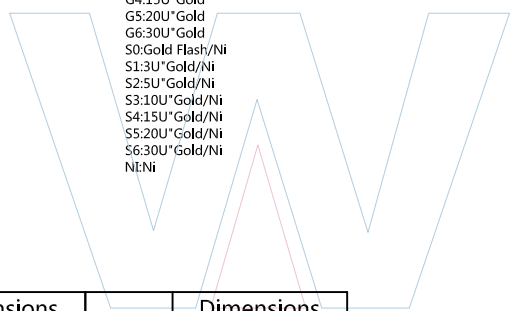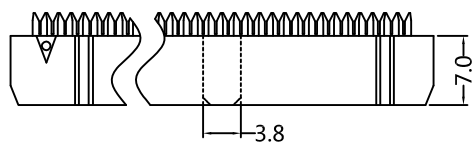

有三角标示是第-PIN位

| Pins | Dimensions | | Pins | Dimensions | |
|------|------------|-------|------|------------|-------|
| | A | B | | A | B |
| 6 | 12.32 | 5.08 | 26 | 37.72 | 30.48 |
| 8 | 14.86 | 7.62 | 30 | 42.80 | 35.56 |
| 10 | 17.40 | 10.16 | 34 | 47.88 | 40.64 |
| 12 | 19.94 | 12.70 | 36 | 50.42 | 43.18 |
| 14 | 22.48 | 15.24 | 40 | 55.50 | 48.26 |
| 16 | 25.02 | 17.78 | 44 | 60.58 | 53.34 |
| 18 | 27.56 | 20.32 | 50 | 68.20 | 60.96 |
| 20 | 30.10 | 22.86 | 60 | 80.90 | 73.66 |
| 22 | 32.64 | 25.40 | 64 | 85.98 | 78.74 |
| 24 | 35.18 | 27.94 | | | |

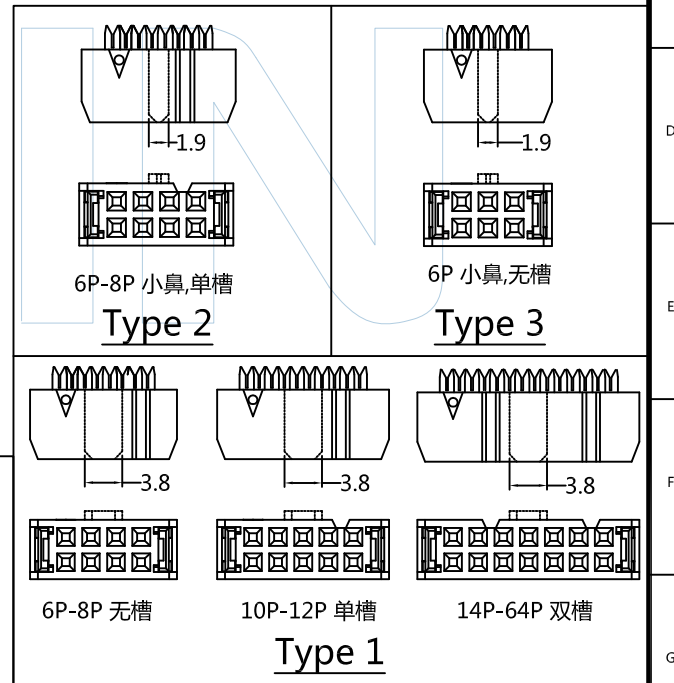

WINPIN

Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

PART NO: IDD1X-XXXXXXX

TITLE: 2.54mm IDC (One Side Contact)

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:phosphor Bronze
Contact Plating:Au over Ni
Insulator Material:PBT+30%GF(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.

| | | | | |
|-----|------------|-------------------------|-------------|-------------|
| A0 | 2015/06/25 | NEW | Jason.Huang | Jason.Huang |
| REV | DATE | MODIFICATION DESCRIPTIO | DRAW | CHANGE |
| | | | APPROVE | |