

PART NUMBER CODING

IDD1 X- XX XX X X X X

Type
1:With Bump
2:w/o Bump

No.of Pins
6-64P






Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Ni
S1:3U"Gold/Ni
S2:5U"Gold/Ni
S3:10U"Gold/Ni
S4:15U"Gold/Ni
S5:20U"Gold/Ni
S6:30U"Gold/Ni
N:ENi

Color
B:Black
G:Grey

Type
1:Type 1
2:Type 2
3:Type 3






Packing
A:Tray

Series
1:Type 1
2:Type 2
3:Type 3

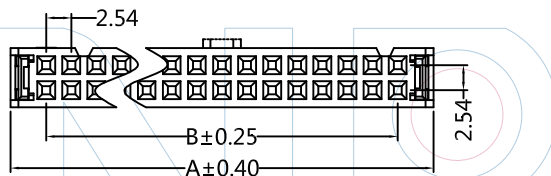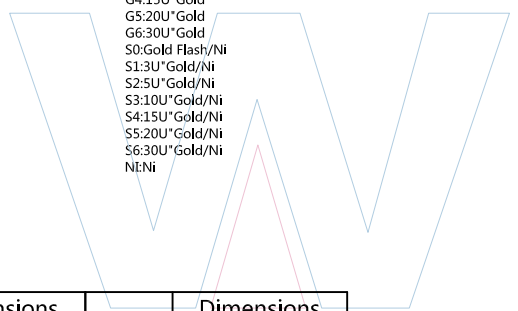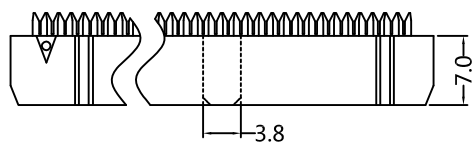

有三角标示是第-PIN位

Pins	Dimensions		Pins	Dimensions	
	A	B		A	B
6	12.32	5.08	26	37.72	30.48
8	14.86	7.62	30	42.80	35.56
10	17.40	10.16	34	47.88	40.64
12	19.94	12.70	36	50.42	43.18
14	22.48	15.24	40	55.50	48.26
16	25.02	17.78	44	60.58	53.34
18	27.56	20.32	50	68.20	60.96
20	30.10	22.86	60	80.90	73.66
22	32.64	25.40	64	85.98	78.74
24	35.18	27.94			

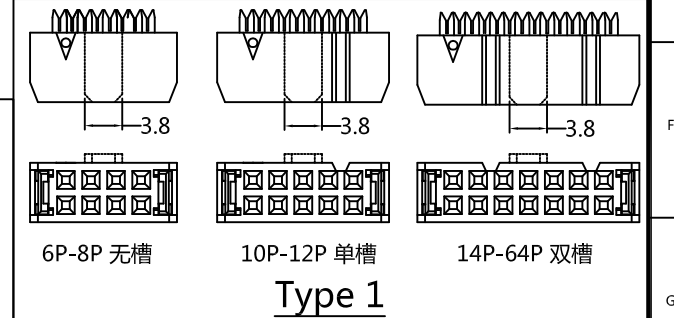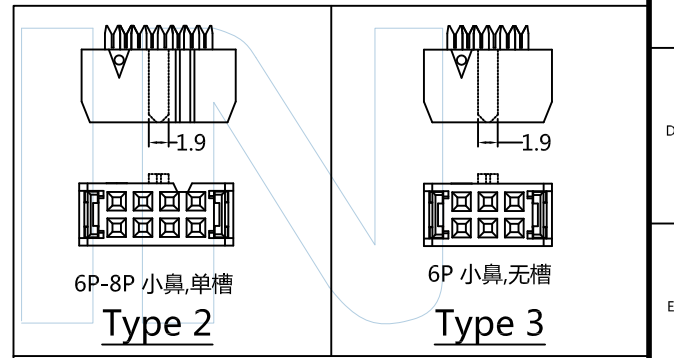

WINPIN

Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: IDD1X-XXXXXXX

TITLE: 2.54mm IDC (One Side Contact)

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Brass
Contact Plating:Au over Ni
Insulator Material:PBT+30%GF(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.

A0	2015/06/25	NEW	Jason.Huang	Jason.Huang	
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE