



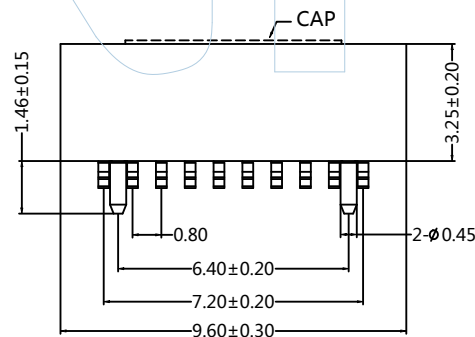


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

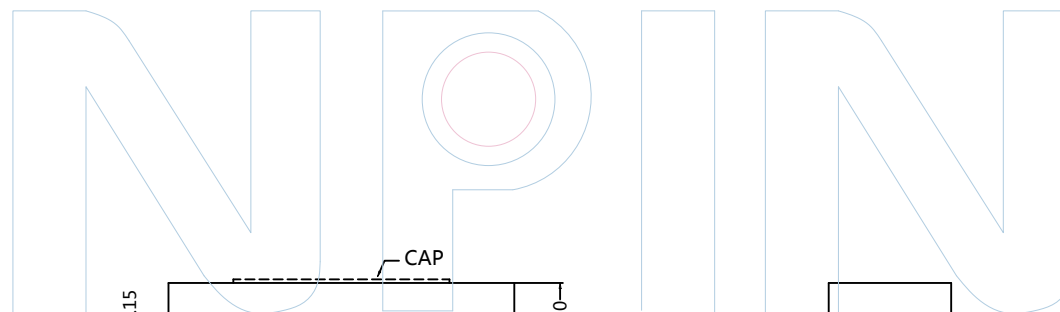

PART NUMBER CODING

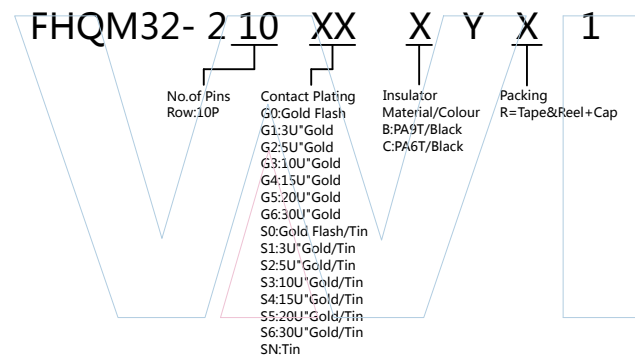

Tel: +86 769 82581808 FAX: +86 769 81766192  
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: FHQM32-210XXXYX1

TITLE: FH0.8 x 1.5mm Dual Row SMT H=3.25mm

NOTES:  
Current Rating: 0.75AMP  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstand Voltage: 500V AC/Minute  
Operation Temperature: -40°C to +105°C

MATERIAL:  
Contact Material: Brass  
Contact Plating: Au or Sn over Ni  
Insulator Material: PA9T/PA6T+30%GF (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE: DECIMALS Angle X.X: ±0.40 ± 3° X.XX: ±0.25 X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2020/11/07	NEW	Myron.Yuan		Myron.Yuan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE