
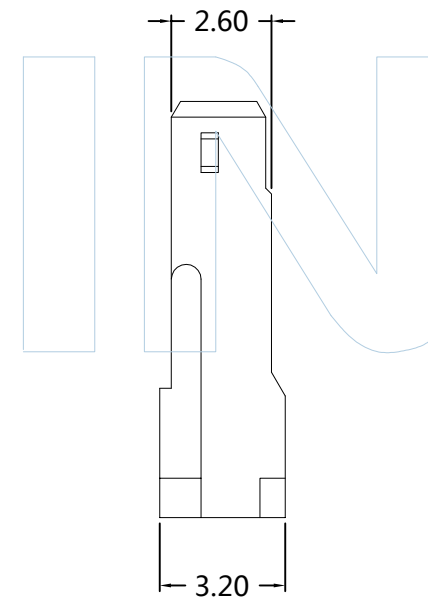
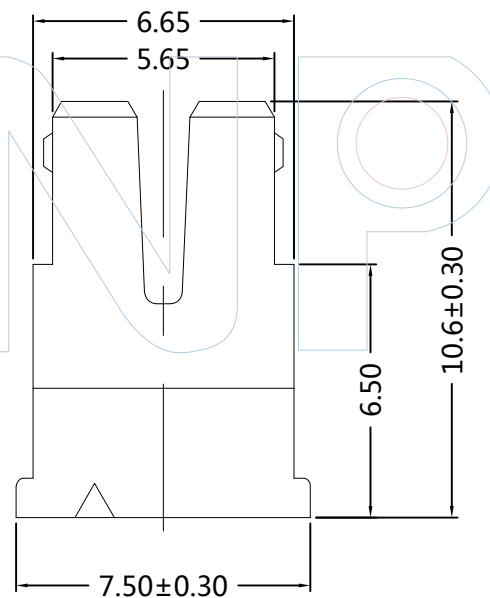


PART NUMBER CODING
H35001-1 02 X 1

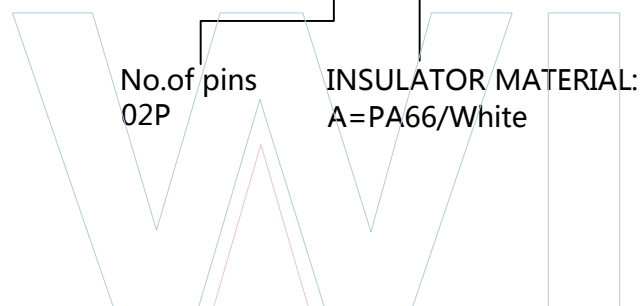

Tel: +86 769 82581808 FAX: +86 769 81766192
 E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: H35001-102X1

TITLE: BDH3.50mm 2P Housing(公壳)

NOTES:
 Current Rating:1.0AMP
 Voltage Rating:1400V AC/DC
 Withstand Voltage:3800V AC/DC
 Contact Resistance:10mΩ Max
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-25°C to +85°C
 Applicable Terminal:T35001-PXX1

Material:
 Housing: PA66 UL94-V0

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
 TOLERANCES ARE:
 DECIMALS Angle
 X.X:±0.40 ± 3°
 X.XX:±0.25
 X.XXX:±0.15


SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2018/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE



PART NUMBER CODING
T35001-P XX 1

Contact plating
 SN: Tin

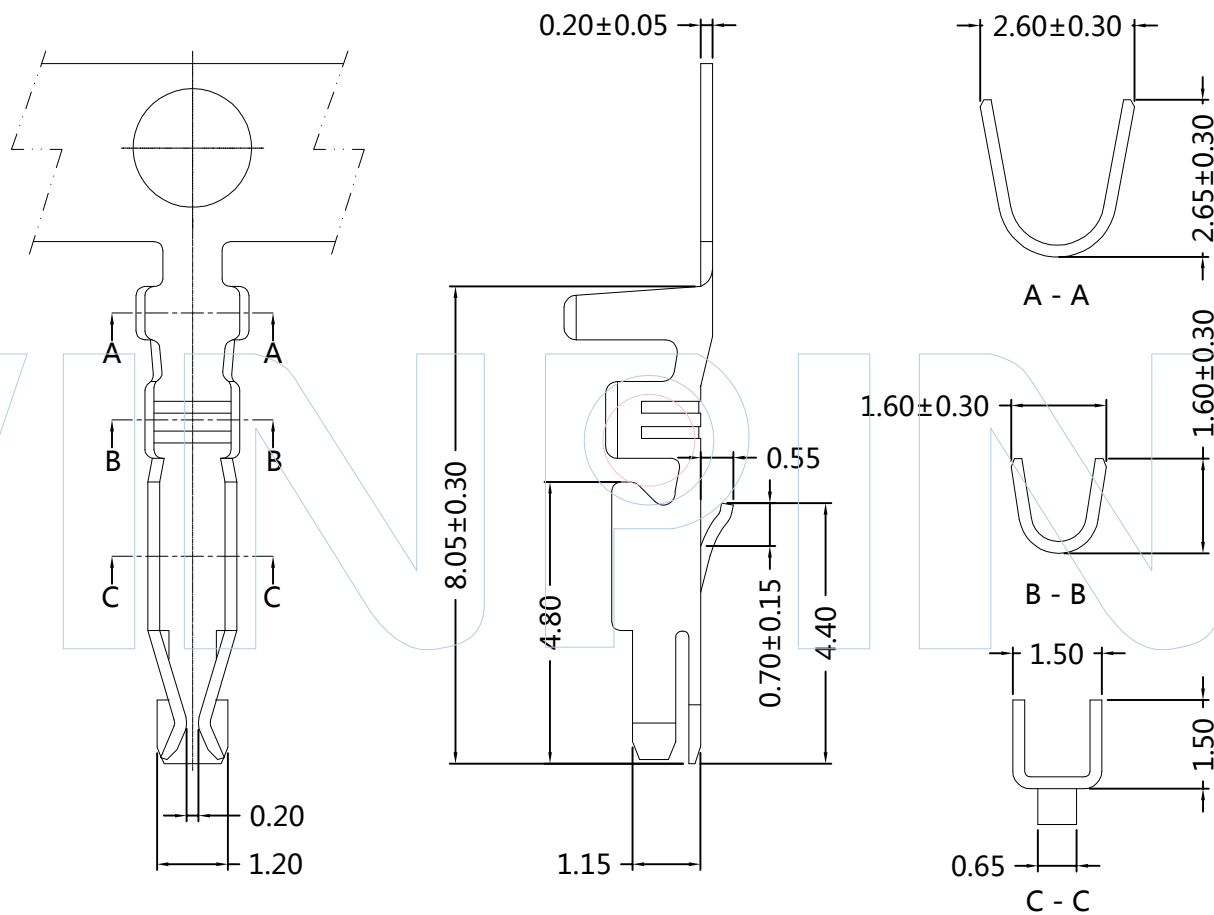

Tel: +86 769 82581808 FAX: +86 769 81766192
 E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: T35001-PXX1

TITLE: BDH3.50mm TERMINAL

NOTES:

Current Rating: 1.0AMP
 Voltage Rating: 1400V AC/DC
 Withstand Voltage: 3800V AC/DC
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -25°C to +85°C
 Applicable Wires: AWG24~28#
 Applicable Housing: H35001-1XXX1

Material:

Contact Material: Phosphor Bronze

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC

TOLERANCES ARE:

DECIMALS Angle

X.X: ± 0.40 $\pm 3^\circ$

X.XX: ± 0.25

X.XXX: ± 0.15


SCALE 1:1

UNIT MM



PROJ.

SHEET

A0	2018/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE

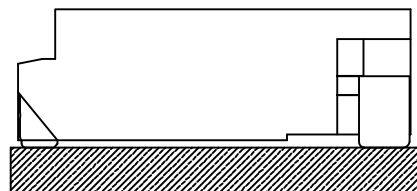



ASSEMBLY LAYOUT

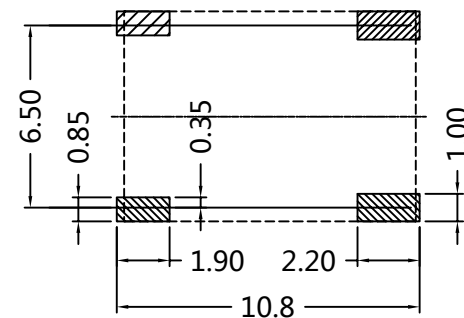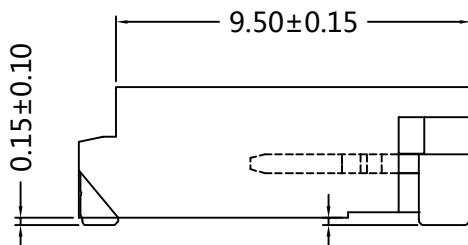

PCB LAYOUT

PART NUMBER CODING
W35001-1 02 Z XX X X 1

No. of pins: 02P
 Contact plating: SN: Tin
 Color: E=Beige
 Packing: R=Tape&Reel

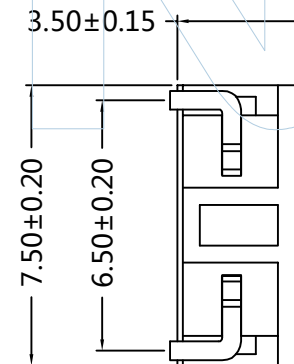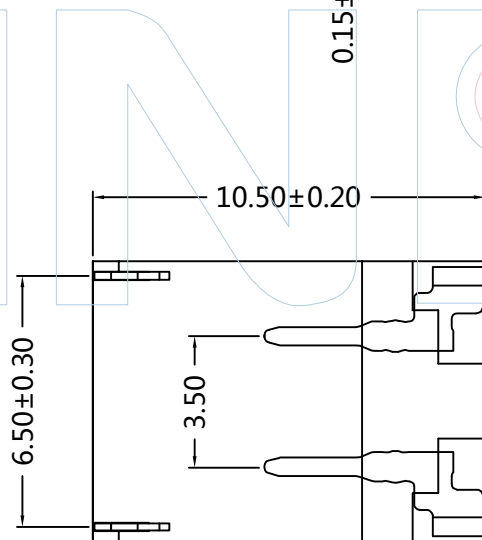

Tel: +86 769 82581808 FAX: +86 769 81766192
 E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: W35001-102ZXXXX1

TITLE: 3.50mm Wafer 90° SMT

NOTES:
 Current Rating:1.0AMP
 Voltage Rating:1400V AC/DC
 Withstand Voltage:3800V AC/DC
 Contact Resistance:30mΩ Max
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-25°C to +85°C
 Applicable Terminal:T35001-PXX1
 Applicable Housing:H35001-102X1

Material:
 Contact Material:Brass
 Contact Plating:Au or Sn over Ni
 Insulator Material:PA9T(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
 TOLERANCES ARE:
 DECIMALS Angle
 X.X:±0.40 ± 3°
 X.XX:±0.25
 X.XXX:±0.15

SCALE 1:1
 UNIT MM
 PROJ.
 SHEET

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE