


**Recommended P.C.B Layout(Top Side)**  
(PCB BOARD TOLERANCE±0.05)

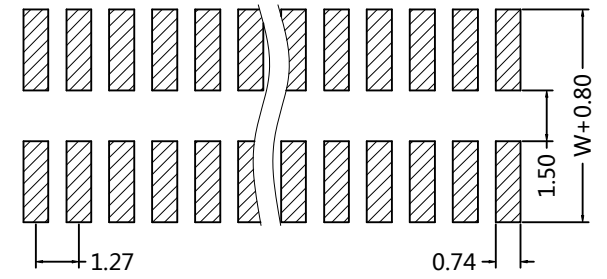

**PART NUMBER CODING**  
PHCM25-32 XX XX X XXX X 1

- No.of Pins  
01-50
- Contact Plating  
G0:Gold Flash  
G1:3U\*Gold  
G2:5U\*Gold  
G3:10U\*Gold  
G4:15U\*Gold  
G5:20U\*Gold  
G6:30U\*Gold  
S0:Gold Flash/Tin  
S1:3U\*Gold/Tin  
S2:5U\*Gold/Tin  
S3:10U\*Gold/Tin  
S4:15U\*Gold/Tin  
S5:20U\*Gold/Tin  
S6:30U\*Gold/Tin  
SN:Tin
- Insulator Material/Colour  
B:PA9T/Black  
C:PA6T/Black
- Pin length  
L=B+D+6.5  
(W-1.27)/2
- Packing  
A=Tray  
T=Tube  
P=Tube+CAP  
R=Tape&Reel+CAP

Dimension antitheses list			
ITEM	B	D	W
Standard	3.00	0.20	5.50
Alternate			

