






Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

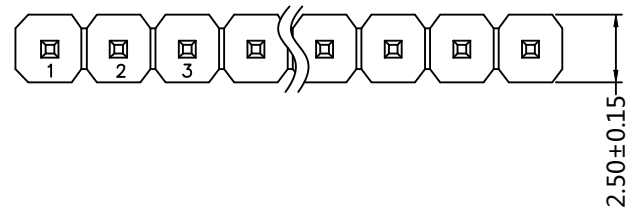

PART NUMBER CODING

PHFS 15-21 XX XX X XXX X X

- No. of Pins: 01-40
- Contact Plating: G0:Gold Flash, G1:3U"Gold, G2:5U"Gold, G3:10U"Gold, G4:15U"Gold, G5:20U"Gold, G6:30U"Gold, S0:Gold Flash/Tin, S1:3U"Gold/Tin, S2:5U"Gold/Tin, S3:10U"Gold/Tin, S4:15U"Gold/Tin, S5:20U"Gold/Tin, S6:30U"Gold/Tin, SN:Tin
- Insulator Material/Colour: A:PBT/Black, B:PA9T/Black, C:PA6T/Black
- Pin leng L=A+B+C
- Packing: B=PE Bag, T=Tube, R=Tape&Reel+CAP
- Series: 1=TYPE1, 2=TYPE2

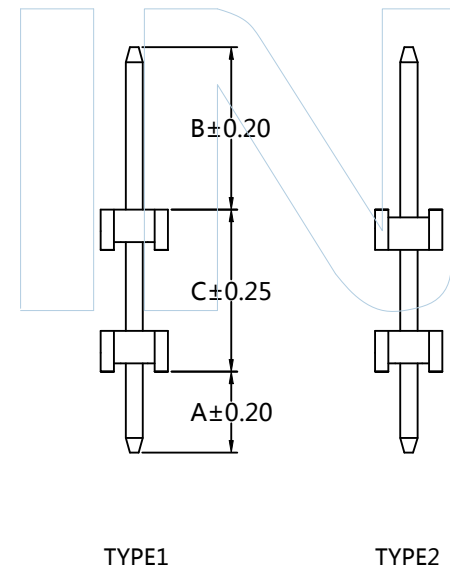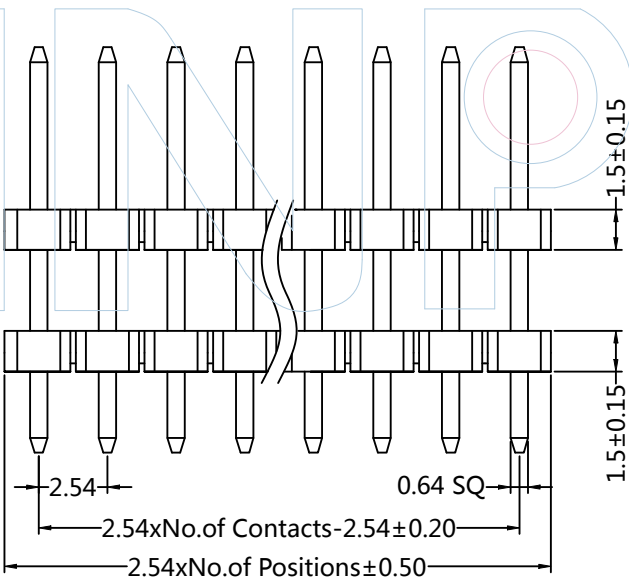

ITEM	A	B	C
Standard	3.00	6.00	0.00
Alternate			



Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronz / Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PBT/PA9T+30%GF (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE: DECIMALS Angle X.X:±0.40 ± 3° X.XX:±0.25 X.XXX:±0.15

PART NO: PHFS15-21XXXXXXXXXX
TITLE: PH 2.54mm Single ROW 180° H=1.5mm Double Plastic

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE