


PART NUMBER CODING MFFR30-1 XX XX X 098 X 1

No. of Pins
02-40 pin

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin

Insulator
Material/Colour
A: PPS/Black

Packing
A: Tray
B: PE Bag
T: Tube

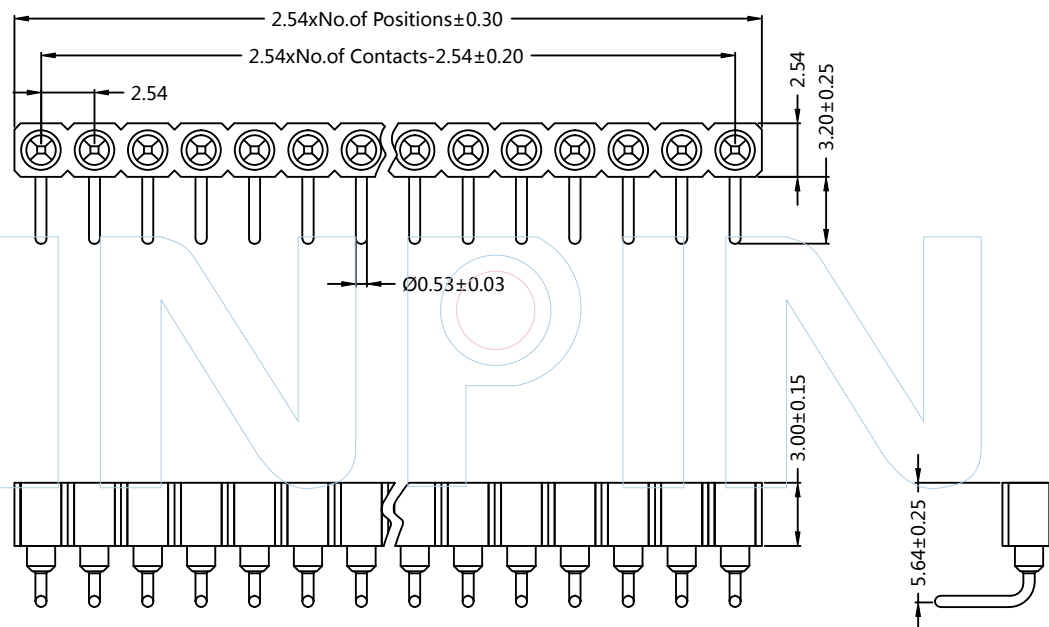

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: MFFR30-1XXXXX098X1

TITLE: 2.54mm Machined Female Header 90° H=3.0 L=9.7mm

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 10MΩ Max
Withstand Voltage: 1000V RMS Min
Mechanical Life: Min 500 cycles
Connecting Pin: $\phi 0.53$ mm
Operation Temperature: -40°C to +105°C

Material
Sleeve: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PPS(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.30
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1
UNIT MM
PROJ. 
SHEET

A0	2018/06/25	NEW	Jason.Huang		Jason.Huang				
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE				