





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)




TYPE1

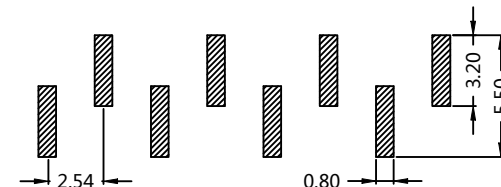




PART NUMBER CODING

MFFM30-1 XX XX X 074 X X

No. of Pins 02-40pin	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	Insulator Material/Colour A:PPS/Black	Packing A:Tray B:PE Bag T:Tube	Series No. 1:Type 1 2:Type 2
-------------------------	---	---	---	------------------------------------



TYPE2

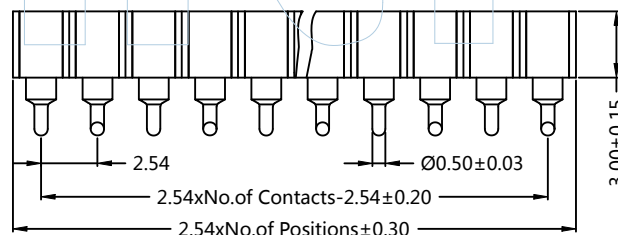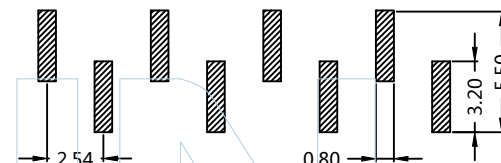

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: MFFM30-1XXXXX074XX

TITLE: 2.54mm Machined Female Header 180°SMT H=3.0 L=7.43mm

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 10MΩ Max
Withstand Voltage: 1000V RMS Min
Mechanical Life: Min 500 cycles
Connecting Pin: Ø0.50mm
Operation Temperature: -40°C to +105°C

Material
Sleeve: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PPS(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
XX: ± 0.30
X.X: ± 0.25
X.XXX: ± 0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan			Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE	