

B

C

PART NUMBER CODING



MPEM28-2 XX XX X 101 X 1

No. of Pins
02-40pin



Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S5:20U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin

Insulator
Material/Colour
A:PPS/Black

Packing
A:Tray
B:PE Bag
T:Tube

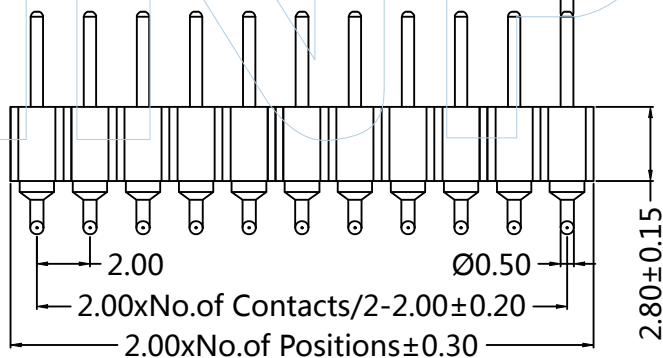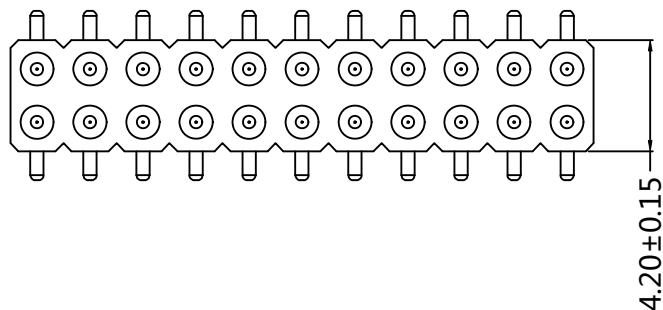

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE+0.05)

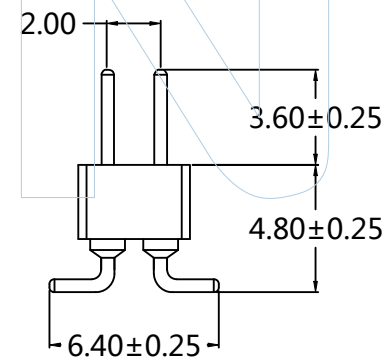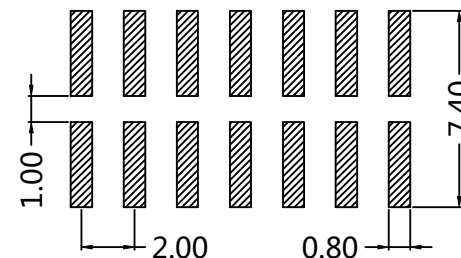

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: MPEM28-2XXXXX101X1

TITLE: 2.00mm Machined Pin Header Dual Row 180°SMT H=2.8 L=10.1

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 10mΩ Max
Withstand Voltage: 1000V AC/DC
Mechanical Life: Min 500 cycles
Connecting Pin: Ø0.47/Ø0.50mm
Operation Temperature: -40°C to +105°C

Material:
Sleeve: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PPS(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ. 
SHEET

A0	2015/06/25	NEW	NiKe.Tan	_____	Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE