






PART NUMBER CODING
MPMS30 - 1 XX XX X 100 X 1

No. of Pins
01~40Pin

Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
SN:tin

Insulator
Material/Colour
A:PPS/Black

Packing
B:PE Bag
T:Tube

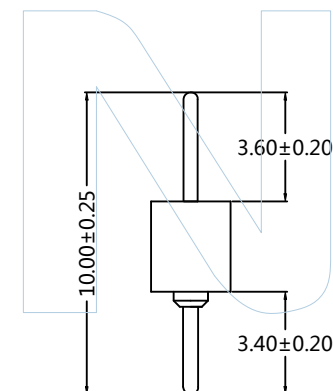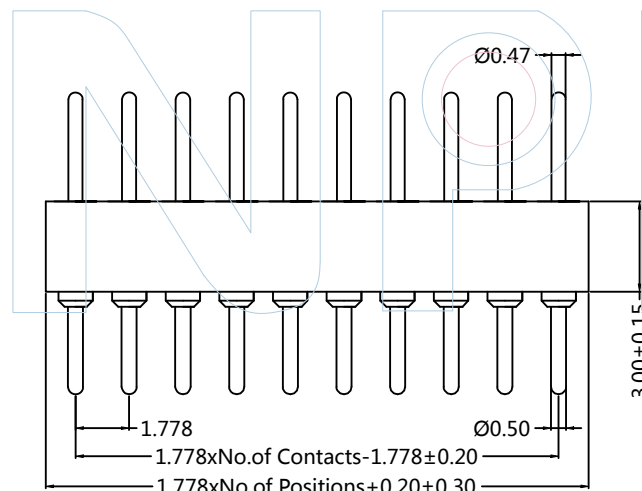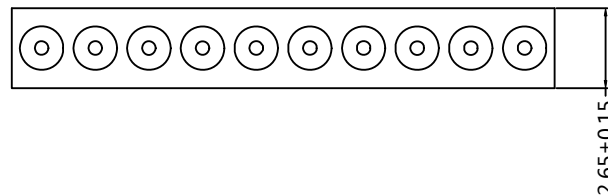

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: MPMS30-1XXXXX100X1

TITLE: 1.778mm Machined Pin Header Single Row 180° H=3.00 L=10.0

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 10mΩ Max
Withstand Voltage: 1000V AC/DC
Mechanical Life: Min 500 cycles
Connecting Pin: Ø0.47/Ø0.50mm
Operation Temperature: -40°C to +105°C

Material:
Sleeve: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PPS(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE