


FHFM71- 1 XX XX X U X X

Series No.
1=Type1
2=Type2
+Cap

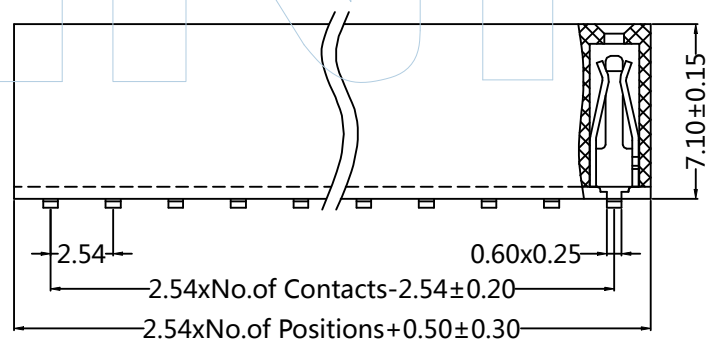

Type 2

Diagram illustrating a Type 2 staircase profile. The profile shows two steps. The first step has a vertical rise of 1.02 and a horizontal run of 2.54. The second step has a vertical rise of 3.00 and a horizontal run of 5.00. The steps are represented by hatched rectangles.



TITLE: FH2.54mm Single Female H=7.1mm SMT PC4.0mm

Current Rating:3.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

PROJ.	
DEPT.	

S					
	A0	2015/06/25	NEW	GF.He	_____ Andy
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE APPROVE