





Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)


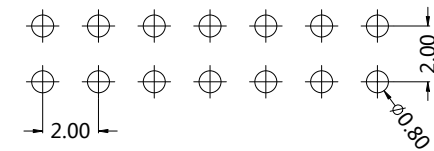


PART NUMBER CODING

FHER72- 2 XX XX X U X X

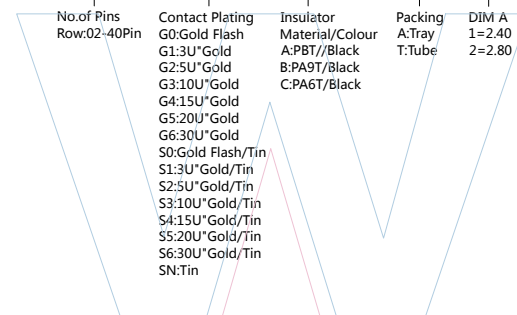

Prat No.	Dim A (mm)
FHER72-2XXXXXUX1	2.40
FHER72-2XXXXXUX2	2.80

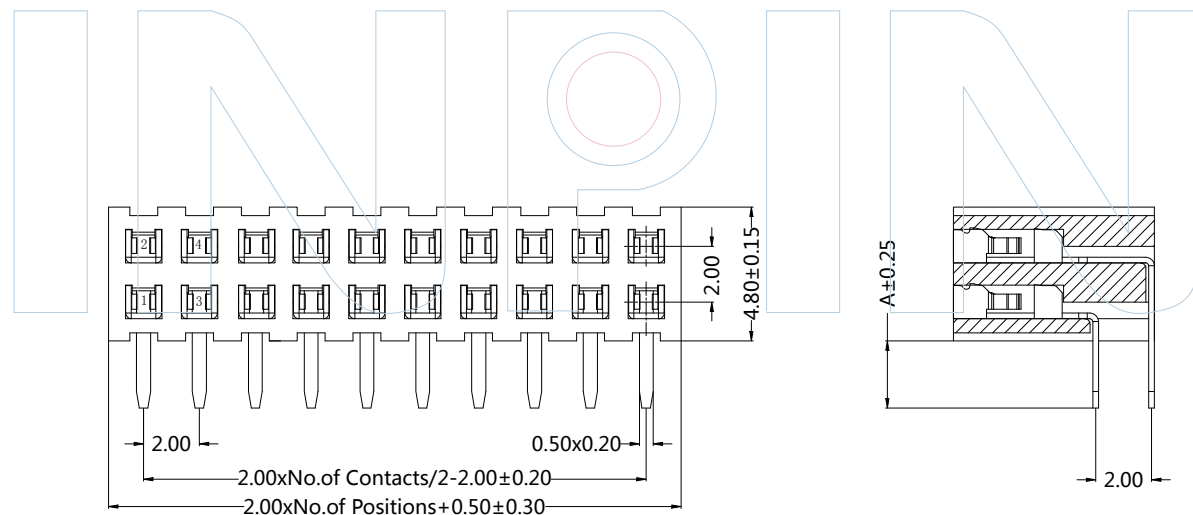

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: FHER72-2XXXXXUXX

TITLE: FH2.00mm Dual Female H=7.20mm 90° Up Insert

NOTES:
Current Rating:2.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE