




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



PART NUMBER CODING

FHES43- 1 XX XX X U X X


No.of Pins
Row:02-40Pin

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin

Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black



Packing
A=Tray
T=Tube

DIM L
1=2.7
2=2.4

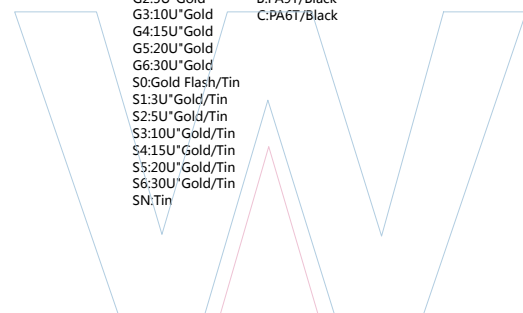

Dimensions Antitheses List

Part No.	DIM L
FHES43-1XXXXXUX1	2.70
FHES43-1XXXXXUX2	2.40

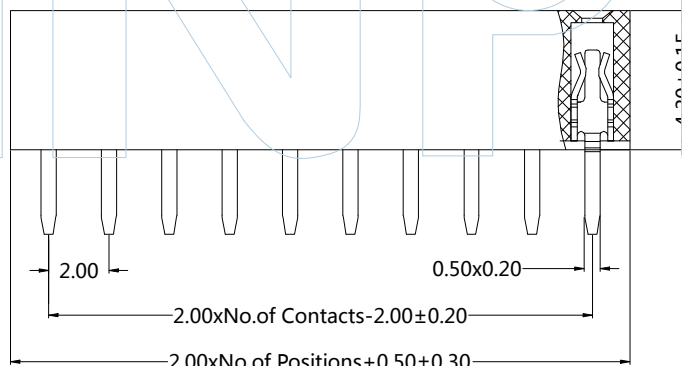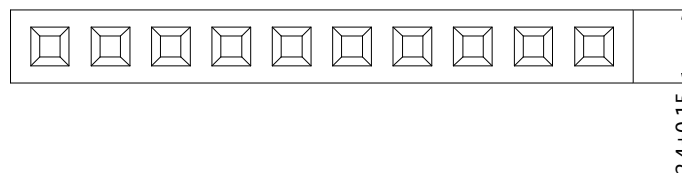

4.30±0.15

DIM L±0.25



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: FHES43-1XXXXXUXX

TITLE: FH2.00mm Single Female H=4.3mm

NOTES:

Current Rating:2.0AMP
Contact Resistance:20m Ω Max
Insulation Resistance:1000M Ω Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE