
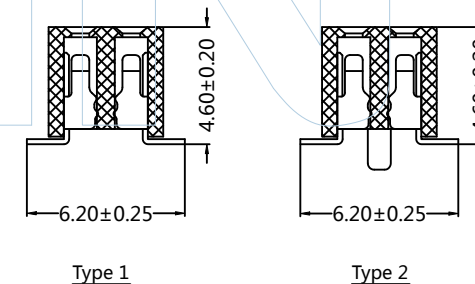
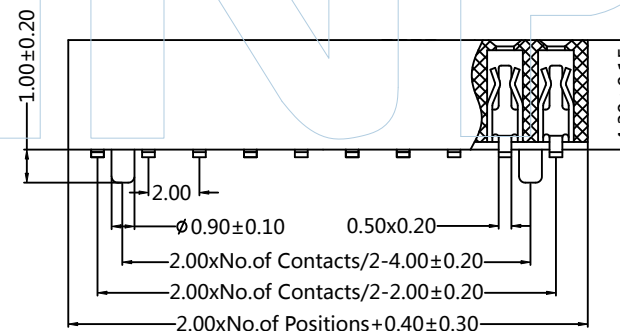
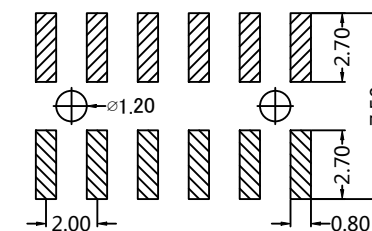


FHEM43- 2 XX XX X U X X

```
type
=Type1
```

=Type2

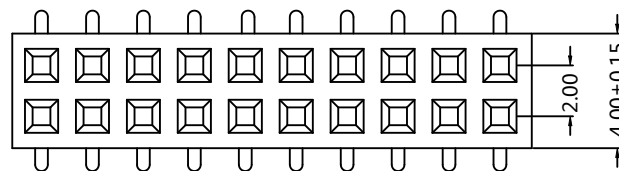

TITLE: FH2.00mm Dual Female H=4.3mm SMT W=4.0

Current Rating:2.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating: Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

PROJECT	4-1
SHEET	

S					
	A0	2015/06/25	NEW	Huan.Tan	_____
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE
					APPROVE