

PART NUMBER CODING


FHCS34- 1 XX XX X U X 2

No. of Pins
Row: 02-50 Pin


Contact Plating
G0: Gold Flash
G1: 3U*Gold
G2: 5U*Gold
G3: 10U*Gold
G4: 15U*Gold
G5: 20U*Gold
G6: 30U*Gold
S0: Gold Flash/Tin
S1: 3U*Gold/Tin
S2: 5U*Gold/Tin
S3: 10U*Gold/Tin
S4: 15U*Gold/Tin
S5: 20U*Gold/Tin
S6: 30U*Gold/Tin
SN: Tin

Insulator
Material/Colour
A: PBT/Black
B: PA9T/Black
C: PA6T/Black

Packing
A=Tray
T=Tube



1.80 ± 0.15

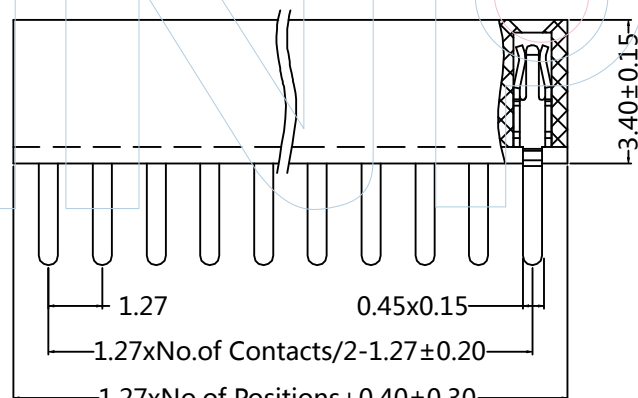


1.27

0.45x0.15

1.27xNo. of Contacts/2-1.27 ± 0.20

1.27xNo. of Positions+0.40 ± 0.30

3.40 ± 0.15



2.40 ± 0.20