

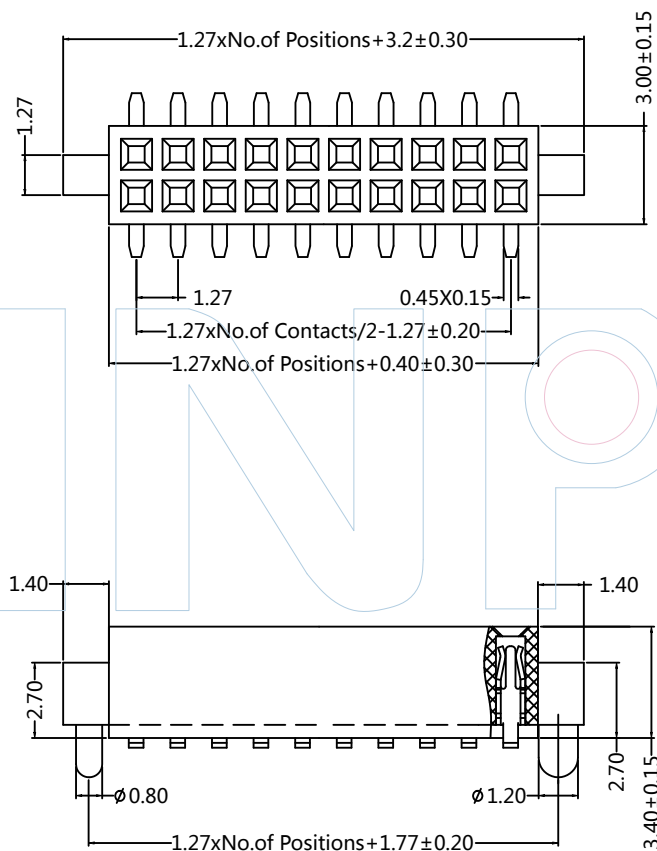


FHCM34- 2 XX XX X U X 3

Packing
T=Tube
P=Tube+Cap
R=Tape&Reel+Cap



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

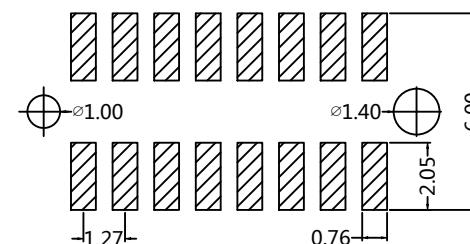

FAX:+86 769 81766192
Http:www.winpin.net

TITLE: FH1.27mm Dual Female SMT H3.40mm 帶外柱 W3.0 PC4.8

NOTES:
Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn over Ni
 Insulator Material: PA9T/PA6T+30%GF
 (UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1	A0	2021/10/25	NEW	GF.He	_____	Andy
UNIT	MM	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
PROJ.							
SHEET							