



Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

PART NUMBER CODING

FHCM34- 2 XX XX X O X X




No. of Pins
Row:02-50Pin

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin


Insulator
Material/Colour
B:PA9T/Black
C:PA6T/Black

Packing
T=Tube
P=Tube+Cap
R=Tape&Reel+Cap

Type
1=Type 1
2=Type 2

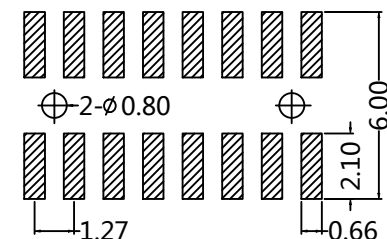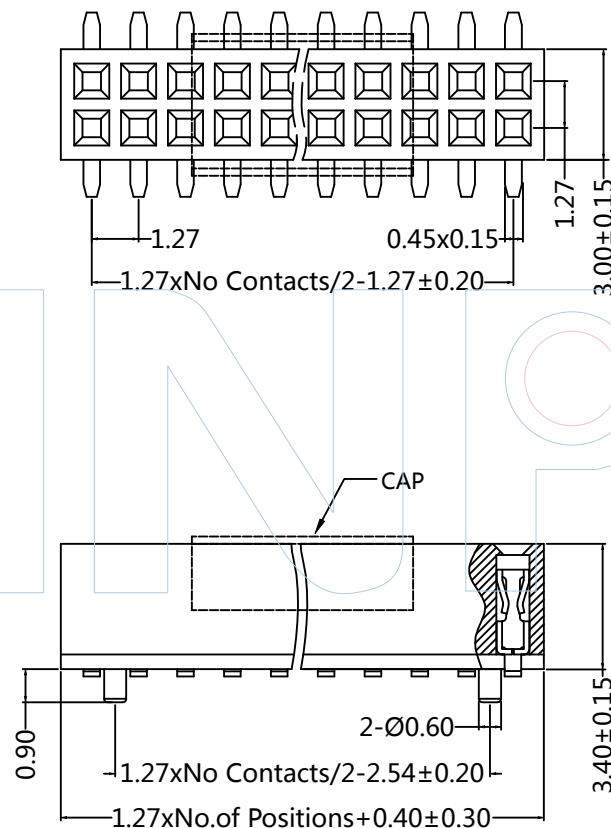

Type 1



Type 2



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: FHCM34-2XXXXXXOX

TITLE: FH1.27mmSingle Female SMT H=3.40mm O型 W3.0 PC5.0

NOTES:
Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MQ Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Phosphor Bronze
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2021/09/17	NEW	NiKe.Tan		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE