




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

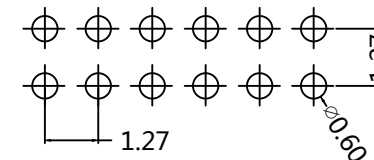

PART NUMBER CODING

FHCS20- 2 XX XX X U X 1

No.of Pins
Row:02-50Pin

Contact Plating

G0:Gold Flash

G1:3U*Gold

G2:5U*Gold

G3:10U*Gold

G4:15U*Gold

G5:20U*Gold

G6:30U*Gold

S0:Gold Flash/Tin

S1:3U*Gold/Tin

S2:5U*Gold/Tin

S3:10U*Gold/Tin

S4:15U*Gold/Tin

S5:20U*Gold/Tin

S6:30U*Gold/Tin

SN:Tin

Insulator

Material/Colour

B:PA9T/Black




C:PA6T/Black

Packing

T=Tube

P=Tube+Cap

R=Tape&Reel+Cap

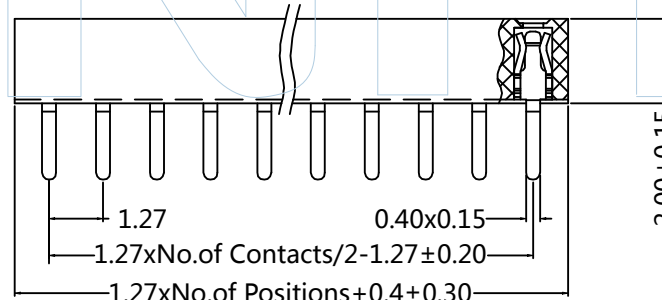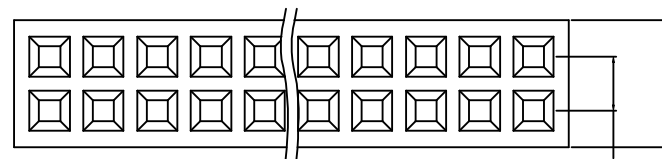

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: FHCS20-2XXXXXU1

TITLE: FH1.27mm Dual Female Header 180° H=2.00mm

NOTES:

Current Rating:1.0AMP
Contact Resistance:20m Ω Max
Insulation Resistance:1000M Ω Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET

A0	2015/06/25	NEW	Andy		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE