



PART NUMBER CODING

FHAM31- 2 XX XX X U X 1

No. of Pins
Per Row:
02-40Pin

Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
SN: Tin

Insulator
Material/Colour
B:PA9T/Black
C:PA6T/Black

Packing
T=Tube
R=Tape&Reel+Cap
M=Tape&Reel+Mylar

Pins	Dimensions		Pins	Dimensions	
	A	B		A	B
2*02	0.80	1.80	2*22	16.80	17.80
2*03	1.60	2.60	2*23	17.60	18.60
2*04	2.40	3.40	2*24	18.40	19.40
2*05	3.20	4.20	2*25	19.20	20.20
2*06	4.00	5.00	2*26	20.00	21.00
2*07	4.80	5.80	2*27	20.80	21.80
2*08	5.60	6.60	2*28	21.60	22.60
2*09	6.40	7.40	2*29	22.40	23.40
2*10	7.20	8.20	2*30	23.20	24.20
2*11	8.00	9.00	2*31	24.00	25.00
2*12	8.80	9.80	2*32	24.80	25.80
2*13	9.60	10.60	2*33	25.60	26.60
2*14	10.40	11.40	2*34	26.40	27.40
2*15	11.20	12.20	2*35	27.20	28.20
2*16	12.00	13.00	2*36	28.00	29.00
2*17	12.80	13.80	2*37	28.80	29.80
2*18	13.60	14.60	2*38	29.60	30.60
2*19	14.40	15.40	2*37	30.40	31.40
2*20	15.20	16.20	2*40	31.20	32.20
2*21	16.00	17.00			

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: FHAM31-2XXXXXUX1

TITLE: FH0.8mm Dual Row SMT 无柱 H=3.10mm

Specifications :

- 1.Voltage rating: 250V AC / DC
- 2.Current rating: 0.75A AC / DC
- 3.Withstanding voltage: 500V AC/minute
- 4.Temperature range: -40°C~105°C
- 5.Insulation resistance: ≥1000MΩ
- 6.Contact resistance: ≤10mΩ
- 7.**Critical dimension


Note:

Plastic Material: PA6T or PA9T,(UL94V-0)
Color: Black
Pin Material: Phosphor Bronze,T=0.2mm
Plated: Au or Ni

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	GF.He		Kirin.Peng
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
ECN NO.				CODE	145

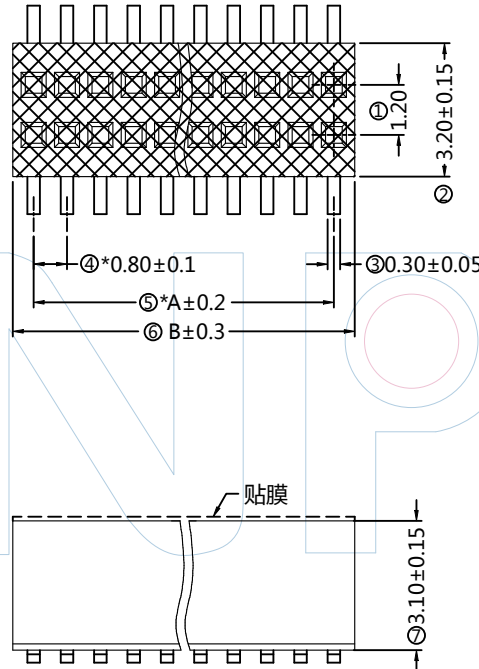

Recommended P.C.B Layout(±0.05)

