

PART NUMBER CODING

EJFS2 - XX XX X X A 4




No.of Pins
06-64

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin


Latch type
L:Long Latch
S:Short Latch

Material/Color
A:PBT/Black
B:PA9T/Black
C:PA6T/Black


Packing
A:Tray

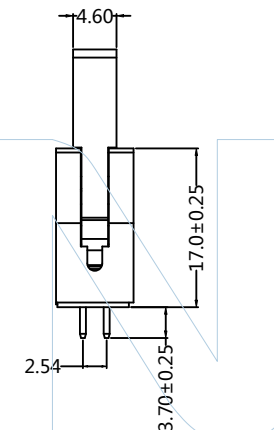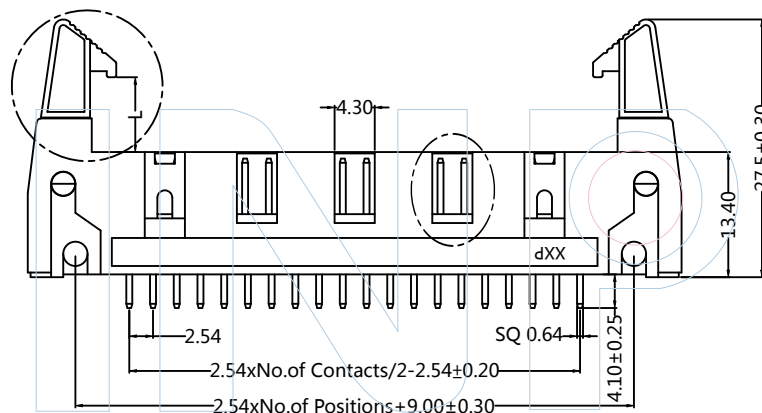


Short Latch




Long Latch

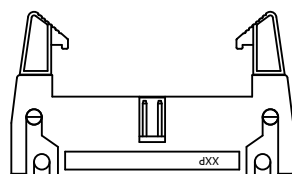

(6P、8P、10P、12P、14、16 PIN)
一个缺口

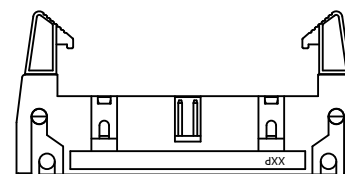

(18、20、24、26、30、34、40、50PIN)
一个缺口，两个窗口

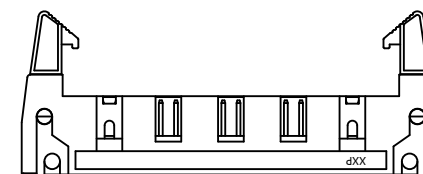

(60、64PIN)
三个缺口
两个窗口

WINPIN

Tel: +86 769 82581808
E-Mail:sales@winpin.net

FAX: +86 769 81766192
Http:www.winpin.net

PART NO: EJFS2-XXXXXXA4

TITLE: 2.54mm Ejector Header 180° PC=3.70mm

NOTES:

Current Rating:3.0AMP
Voltage rating:250V AC/DC
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%G.F
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1

UNIT MM

PROJ. 

SHEET

A0	2022/08/11	NEW	Nike.Tan		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE