



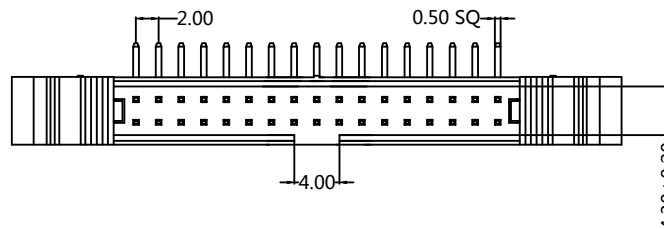



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



PART NUMBER CODING


EJER1 - XX XX X X X X

No. of Pins 06-64P	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	Latch type L:Long Latch S:Short Latch	Color B:Black	Packing A:Tray T:Tube	Insulator Material 1:PA6T 2:PA9T
-----------------------	---	---	------------------	-----------------------------	--

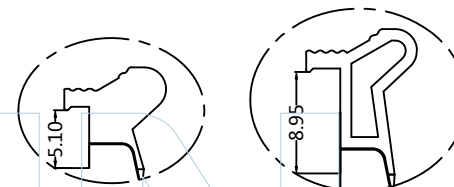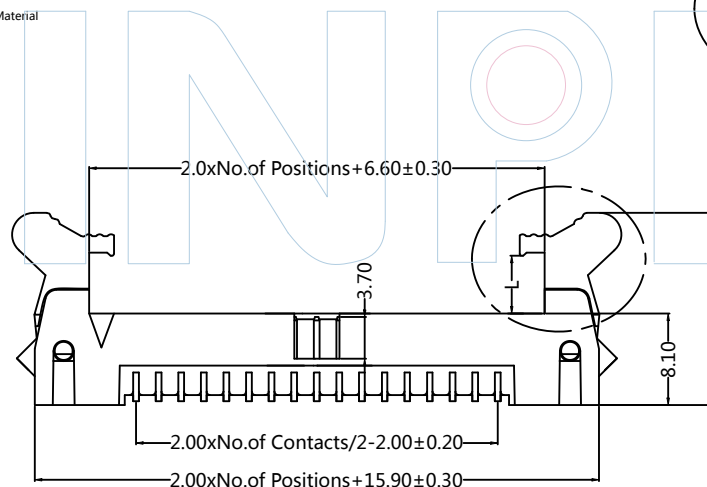

Short Latch
L1=17.00

Long Latch
L1=20.85



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: EJER1-XXXXXXX

TITLE: 2.00mm Ejector Header 90°

NOTES:
Current Rating: 2.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA6T/PA9T+30%G.F
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ±3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	HuaZT		HuaZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE