

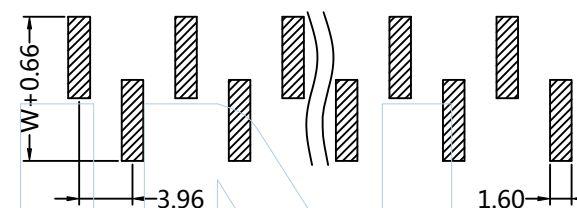
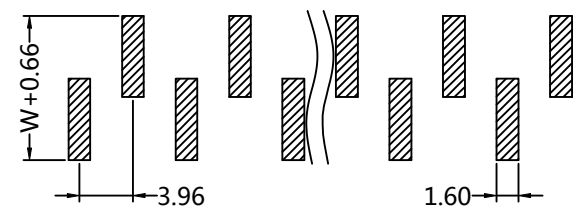
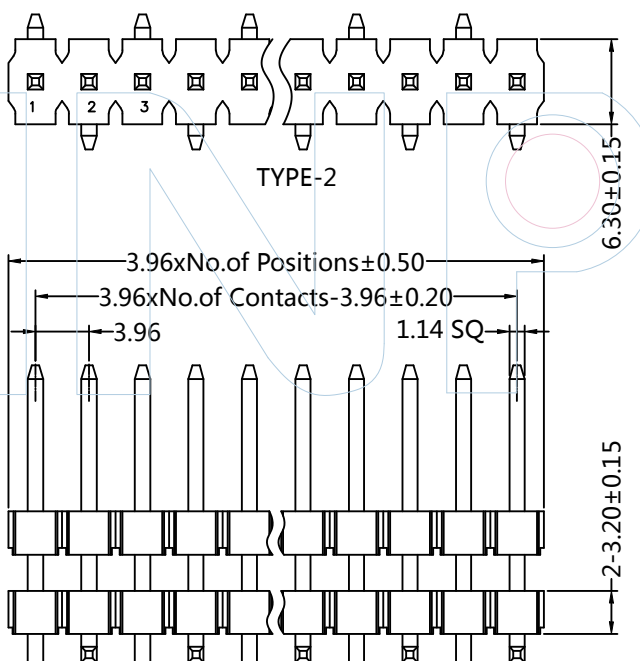


PHGM32-21 XX XX X XXX X X

No. of Pins 01-20	Contact Plating	Insulator Material/Colour	Pin length L=B+C+ D+W/2	Packing B=PE Bag	Series 1=TYPE1 2=TYPE2
G0:Gold Flash	G1:3U"Gold	B:PA9T/Black			
G2:5U"Gold	G3:10U"Gold	C:PA6T/Black			
G4:15U"Gold	G5:20U"Gold	D:ICP/Black			
G6:30U"Gold	S0:Gold Flash/Tin				
S1:3U"Gold/Tin	S2:5U"Gold/Tin				
S3:10U"Gold/Tin	S4:15U"Gold/Tin				
S5:20U"Gold/Tin	S6:30U"Gold/Tin				
SN:Tin					

Dinmension antitheses list				
ITEM	B	C	D	W
Standard	10.8		0.85	10.0
Alternate				

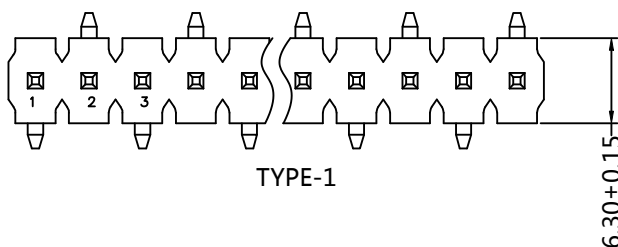

FAX:+86 769 81766192
Http:www.winpin.net

TITLE:PH 3.96mm Single ROW 180°SMT H=3.2 Double Plastic

NOTES:
Current Rating:7.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA9T/PA6T/LCP+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:

DECIMALS	Angle
X.X:±0.40	± 3°
X.XX:±0.25	
X.XXX:±0.15	

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

IS					
	A0	2015/06/25	NEW	Huan.Tan	_____
	REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE
					APPROVE