




PART NUMBER CODING

PHFZ25-11 XX XX X XXX X X



No.of Pins 01-40	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	Insulator Material/Colour B:PA9T/Black C:PA6T/Black	Pin length L=B+C+ 0.3+W/2	Packing T=Tube	Series 3=TYPE3 4=TYPE4
---------------------	---	--	---------------------------------	-------------------	------------------------------

Dimension antitheses list				
ITEM	B	C	D	W
Standard	6.00	5.33	0.70	5.00
Alternate				



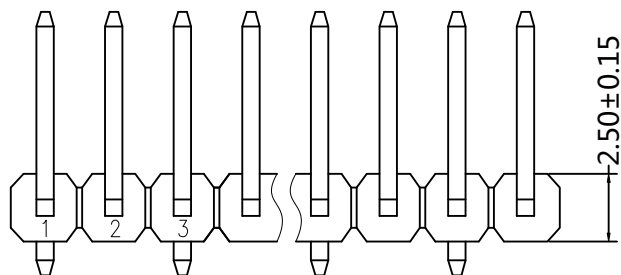


TYPE 3

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

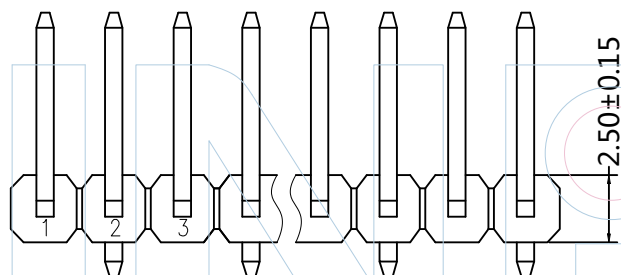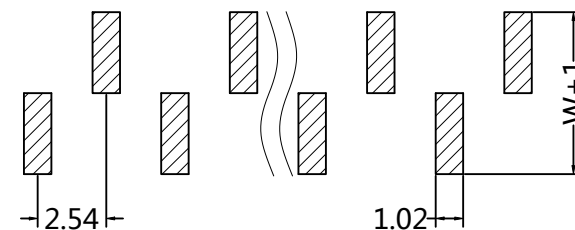

TYPE 4

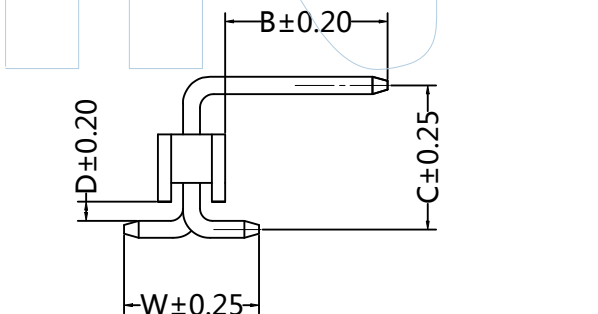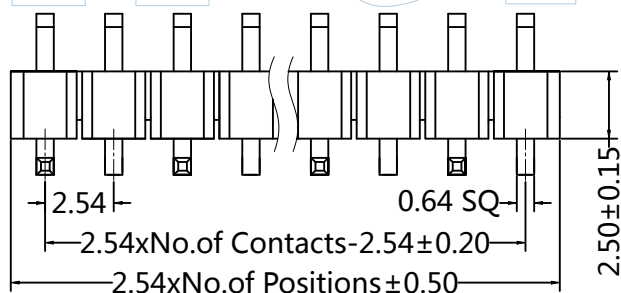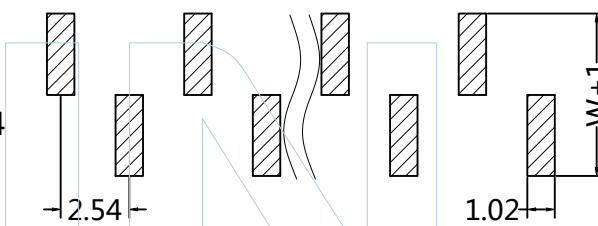

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: PHFZ25-11XXXXXXXXXX

TITLE: PH 2.54mm Single ROW 90°SMT H=2.5mm

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE