

PART NUMBER CODING

PHFR25-12 XX XX X XXX X 3

No. of Pins  
01-40


Contact Plating  
G0:Gold Flash  
G1:3U"Gold  
G2:5U"Gold  
G3:10U"Gold  
G4:15U"Gold  
G5:20U"Gold  
G6:30U"Gold  
S0:Gold Flash/Tin  
S1:3U"Gold/Tin  
S2:5U"Gold/Tin  
S3:10U"Gold/Tin  
S4:15U"Gold/Tin  
S5:20U"Gold/Tin  
S6:30U"Gold/Tin  
SN:Tin

Insulator  
Material/Colour  
A:PBT/Black  
B:PA9T/Black  
C:PA6T/Black

Pin length  
L=2A+2D  
+2.5+2.5

Packing  
T=Tube

| Dimnension antitheses list |      |      |      |  |
|----------------------------|------|------|------|--|
| ITEM                       | A    | W    | D    |  |
| Standard1                  | 3.50 | 5.50 | 1.20 |  |
| Alternate                  |      |      |      |  |

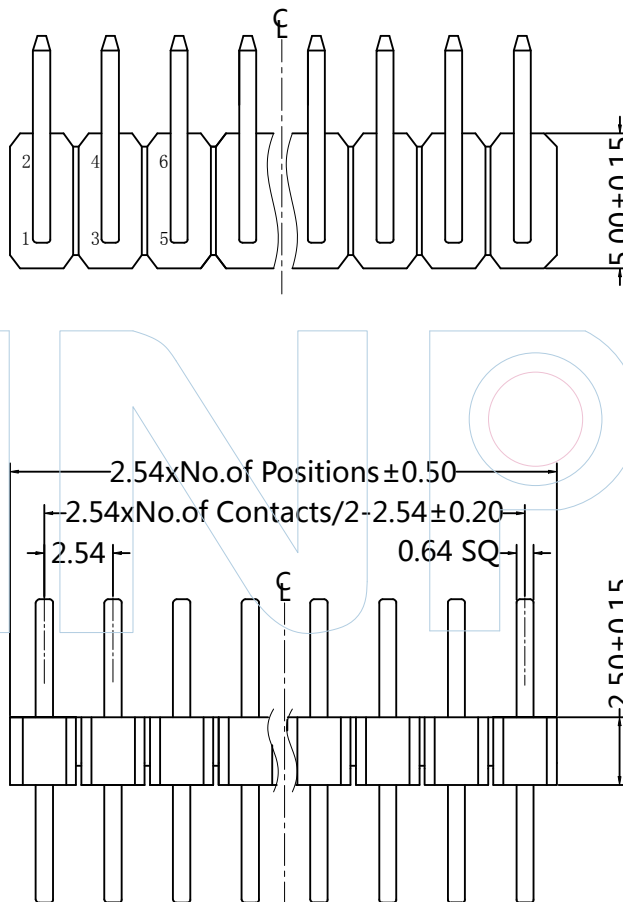

Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

