
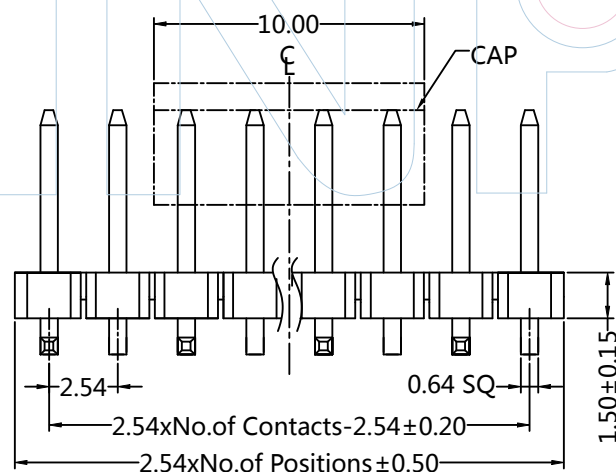
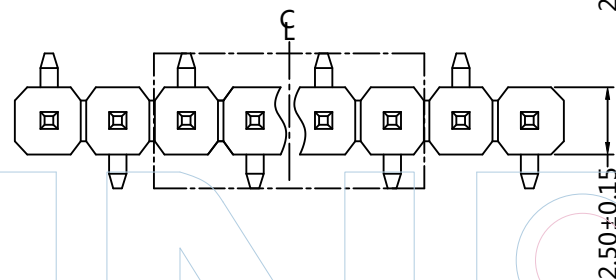





PHFM15-11 XX XX X XXX

No. of Pins 01-40	Contact Plating	Insulator Material/Colour	Pin length(short) $L=B+D+1.5+W/2$	Packing	Series
G0:Gold Flash				T=Tube	1=TYPE1
G1:3U" Gold		B:PA9T/Black		P=Tube+CAP	2=TYPE2
G2:5U" Gold		C:PA6T/Black		R=Tape&Reel+CAP	
G3:10U" Gold					
G4:15U" Gold					
G5:20U" Gold					
G6:30U" Gold					
S0:Gold Flash/Tin					
S1:3U" Gold/Tin					
S2:5U" Gold/Tin					
S3:10U" Gold/Tin					
S4:15U" Gold/Tin					
S5:20U" Gold/Tin					
S6:30U" Gold/Tin					
SN:Tin					

Dinmension antitheses list				
ITEM	W	B	D	
Standard	5.00	6.00	0.70	
Alternate				

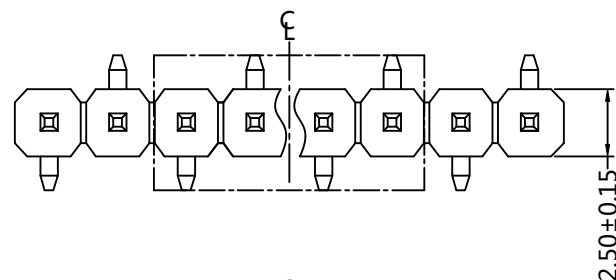

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

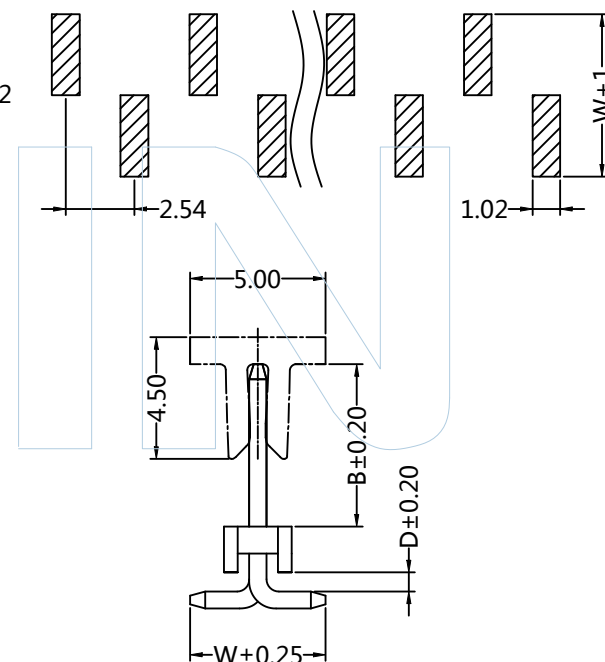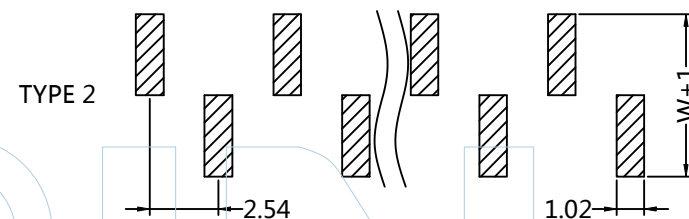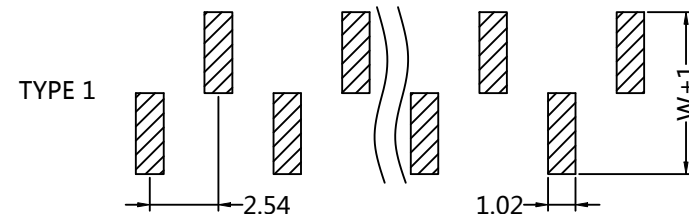

FAX:+86 769 81766192
Http:www.winpin.net

TITLE: PH 2.54mm Single ROW 180°SMT H=1.5mm

NOTES:
Current Rating:3AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Phosphor Bronze or Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2019/02/22	NEW	Huan.Tan	_____	Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE