
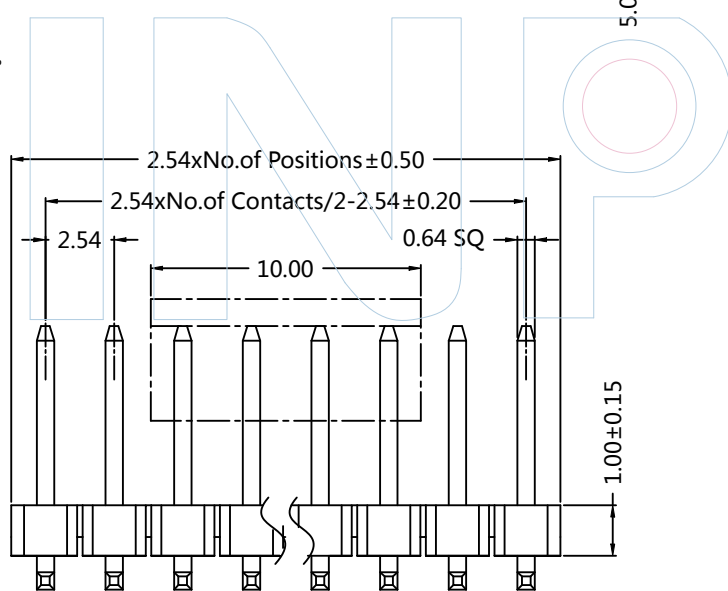




PHFM10-12 XX XX X XXX X 1

Packing
+ T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

Dinmension antitheses list				
ITEM	B	C	W	
Standard	10.0	0.63	5.50	
Alternate				

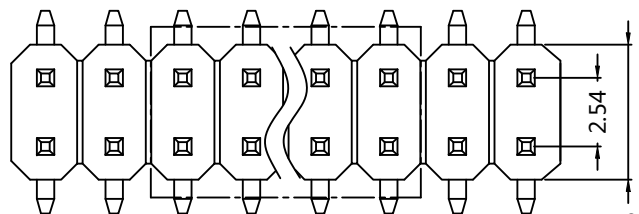

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

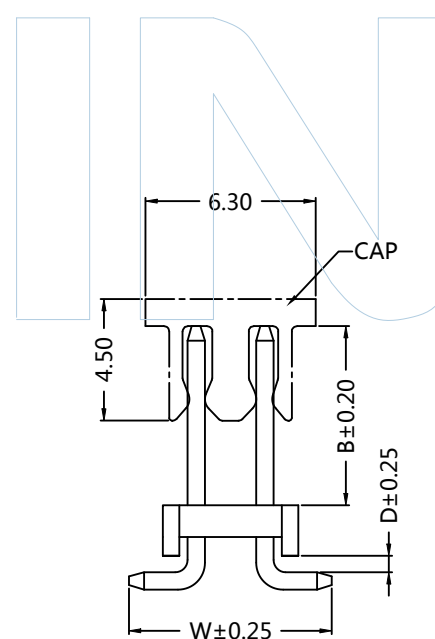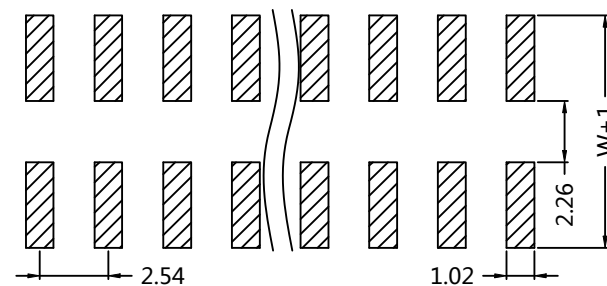

FAX:+86 769 81766192
Http:www.winpin.net

TITLE: PH 2.54 Dual ROW 180°SMT H=1.0mm

Current Rating:3AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating: Au or Sn over Ni
Insulator Material:PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

S					
	A0	2018/06/25	NEW	Jason.Huang	Jason.Huang
	REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE