



PART NUMBER CODING

PHEZ20-12 XX XX X XXX X 2

No. of Pins
01-40

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin



Insulator
Material/Colour
B:PA9T/Black
C:PA6T/Black

Pin length(short)
L=B+C+2.2



Packing
B=PE Bag
T=Tube
P=Tube+CAP
R=Reel+CAP

Dimension antitheses list

ITEM	B	C	
Standard	4.00	2.80	
Alternate			

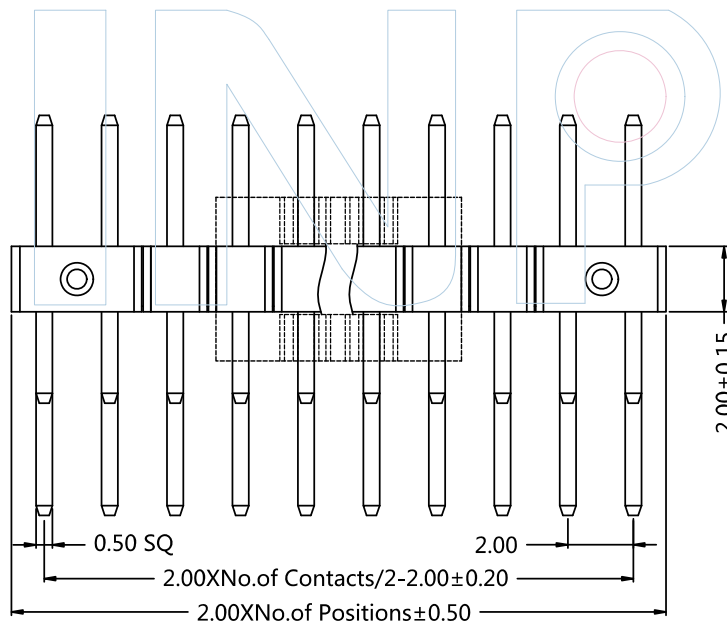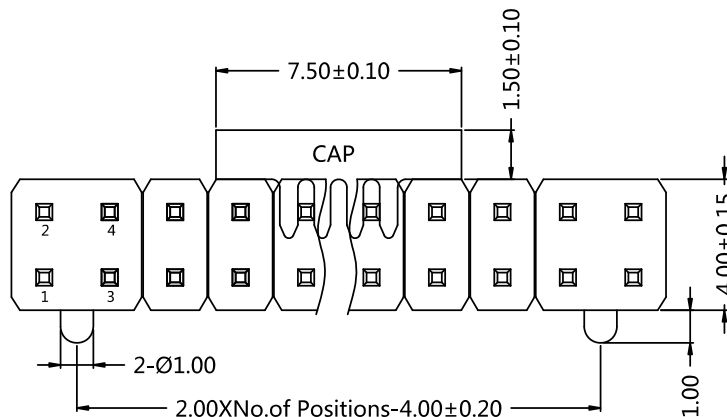

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE+0.05)

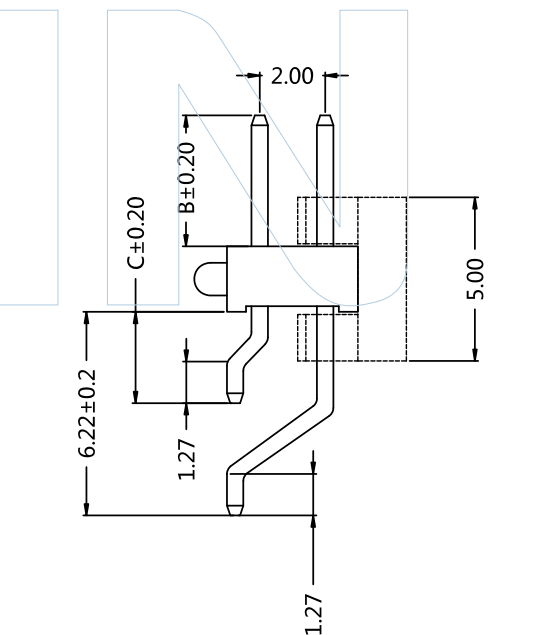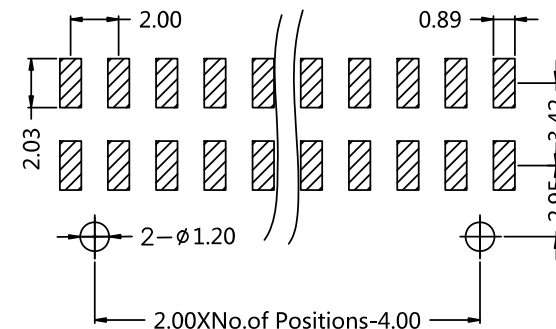

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: PHEZ20-12XXXXXXX2

TITLE:PH 2.00mm Dual ROW 90°SMT H=2.0mm With Post

NOTES:

Current Rating:2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn over Ni

Insulator Material:PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE