



PART NUMBER CODING

PHEM20-11 XX XX X XXX X X

No.of Pins
01-40

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:tin


Insulator
Material/Colour
B:PA9T/Black
C:PA6T/Black

Pin length(short)
 $L=B+D+2.0+W/2$


Packing
B=PE Bag
T=Tube
P=Tube+CAP
R=Reel+CAP

Series
1=TYPE1
2=TYPE2


Dimnension antitheses list			
ITEM	B	W	D
Standard	4.00	4.50	0.80
Altemate			

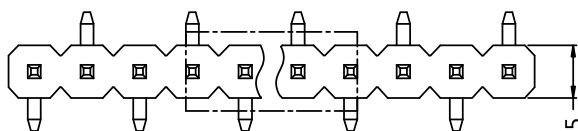


2.00±0.15

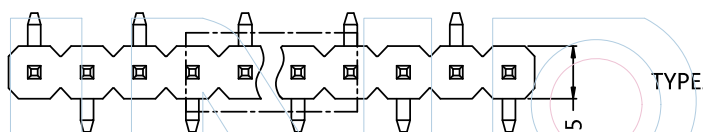


2.00±0.15

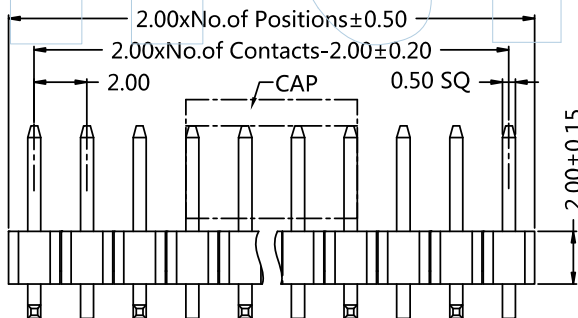


Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

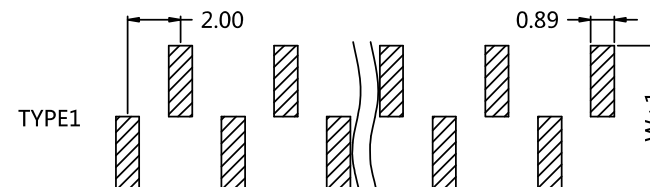

TYPE1

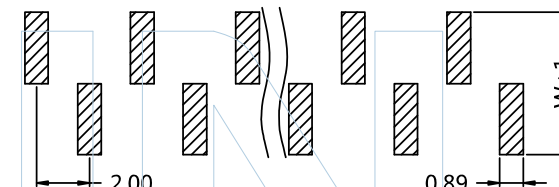

TYPE2



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

PART NO: PHEM20-11XXXXXXXXXX

TITLE: PH 2.00mm Single ROW 180°SMT H=2.0mm

NOTES:
Current Rating:2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE