
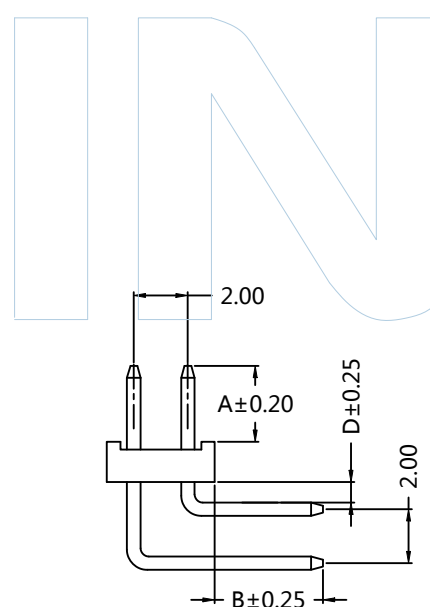
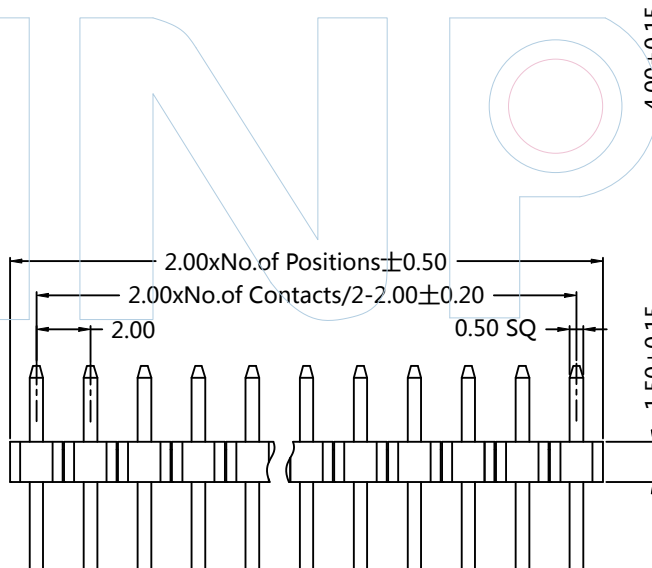


PHER15-12 XX XX X XXX X 2

Packing
B=PE Bag
T=Tube

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

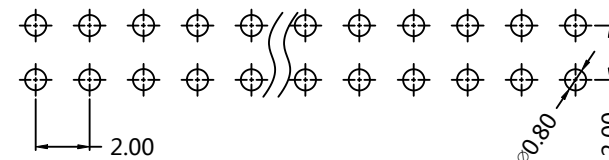

FAX:+86 769 81766192
Http:www.winpin.net

TITLE:PH 2.00mm Dual ROW 90° H=1.5mm PLANE BENDING

Current Rating:2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

S					
	A0	2015/06/25	NEW	Huan.Tan	Huan.Tan
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE APPROV