


PART NUMBER CODING



PHEM15-22 XX XX X XXX X X

No. of Pins 01-40	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	Insulator Material/Colour B:PA9T/Black C:PA6T/Black	Pin length(short) L= B+C+D+ (W-2)/2	Packing B=PE Bag T=Tube P=Tube+CAP R=TAPE%Reel+CAP	Series 1=TYPE1 2=TYPE2
----------------------	---	--	---	--	------------------------------

Dimension antitheses list				
ITEM	B	C	W	D
Standard	4.50		6.50	0.50
Alternate				

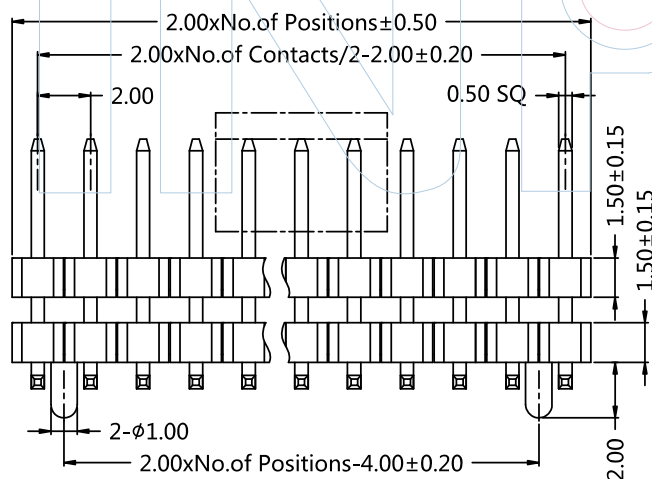

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

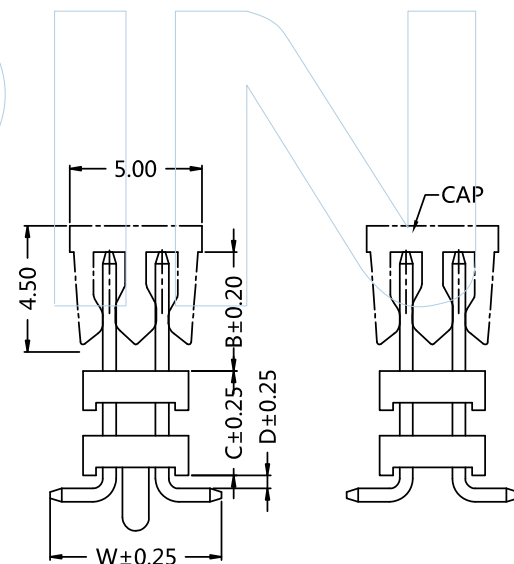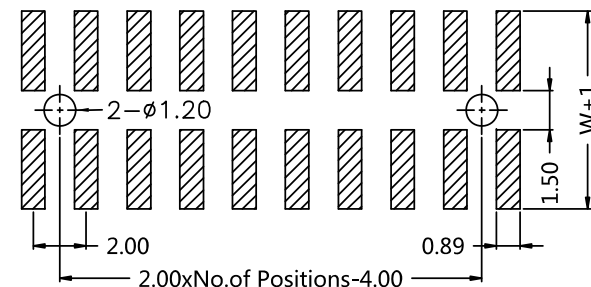

TYPE2 WITH POST

TYPE1 W/O POST



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

PART NO: PHEM15-22XXXXXXXXXX

TITLE: PH 2.00mm Dual ROW 180°SMT H=1.5mm

NOTES:
Current Rating:2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE