

PART NUMBER CODING

PHEM15-11

XX

XX

X

XXX

X

X

- No. of Pins
01-40

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:20U" Gold
 G6:30U" Gold
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:20U" Gold/Tin
 S6:30U" Gold/Tin
 SN:Tin




Insulator
 Material/Colour
 B:PA9T/Black
 C:PA6T/Black

Pin length(short)
 L=B+D+1.5+W/2




Packing
 B=PE Bag
 T=Tube
 P=Tube+CAP
 R=TAPE%Reel+CAP

Series
 1=TYPE1
 2=TYPE2

Dimension antitheses list			
ITEM	B	W	D
Standrad	4.00	4.50	0.80
Alternate			

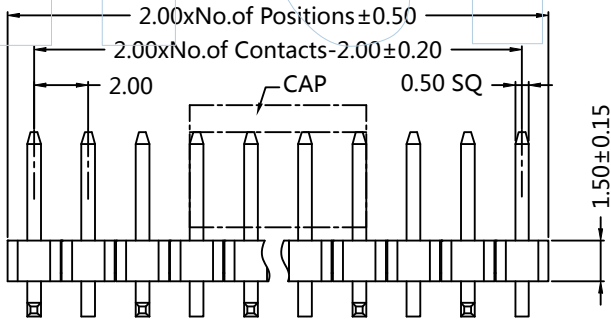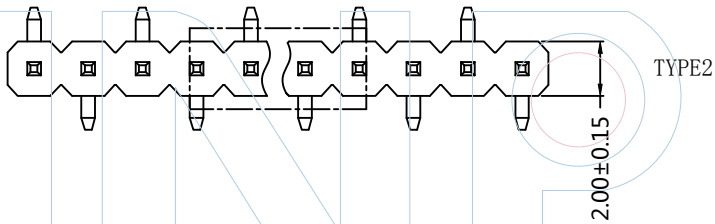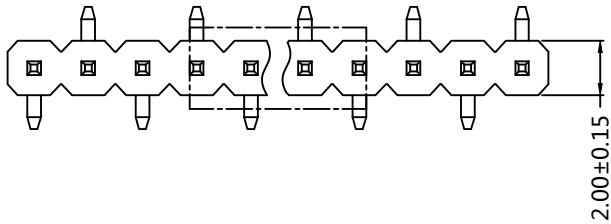

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

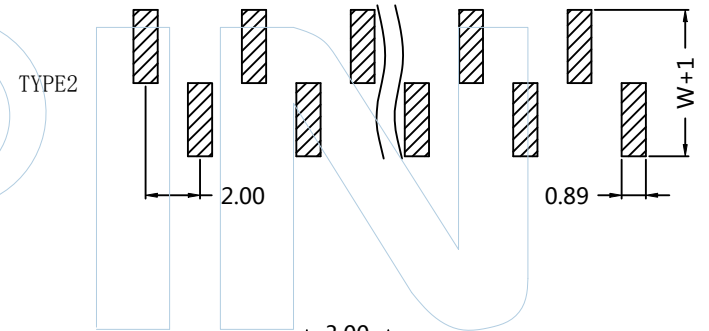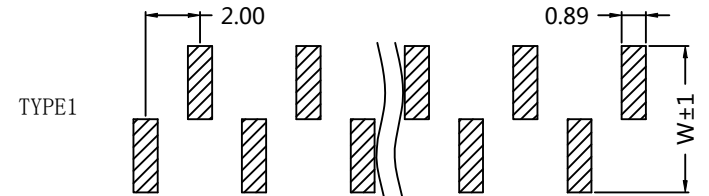

NOTES:
 Current Rating:2.0AMP
 Withstand Voltage:500V AC/DC
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn over Ni
 Insulator Material:PA9T/PA6T+30%GF
 (UL94V-0)

UNLESS OTHERWISE
 SPECIFIED DIMENSIONS
 ARE IN METRIC
 TOLERANCES ARE:
 DECIMALS Angle
 X.X:±0.40 ± 3°
 X.XX:±0.25
 X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE