


PART NUMBER CODING



PHDM25-12 XX XX X XXX

No. of Pins 01-50	Contact Plating	Insulator Material/Colour	Pin length $L = B + D + 2.5$ + (W-2.54)/2	Packing T= Tube P= Tube+ CAP R= Tape+Reel +CAP	Series No. 1=Type1 2=Type2
G0:Gold Flash	G1:3U"Gold	B:PA9T/Black			
G2:5U"Gold	G3:10U"Gold	C:PA6T/Black			
G4:15U"Gold	G5:20U"Gold				
G6:30U"Gold	S0:Gold Flash/Tin				
S1:3U"Gold/Tin	S2:5U"Gold/Tin				
S3:10U"Gold/Tin	S4:15U"Gold/Tin				
S5:20U"Gold/Tin	S6:30U"Gold/Tin				
SN: Tin					

Dimension antitheses list			
ITEM	B	D	W
Standard	6.00	0.30	7.50
Alternate			

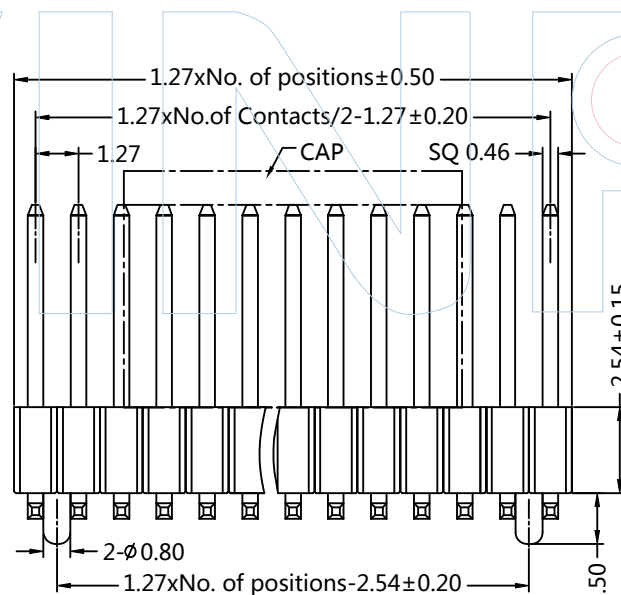

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

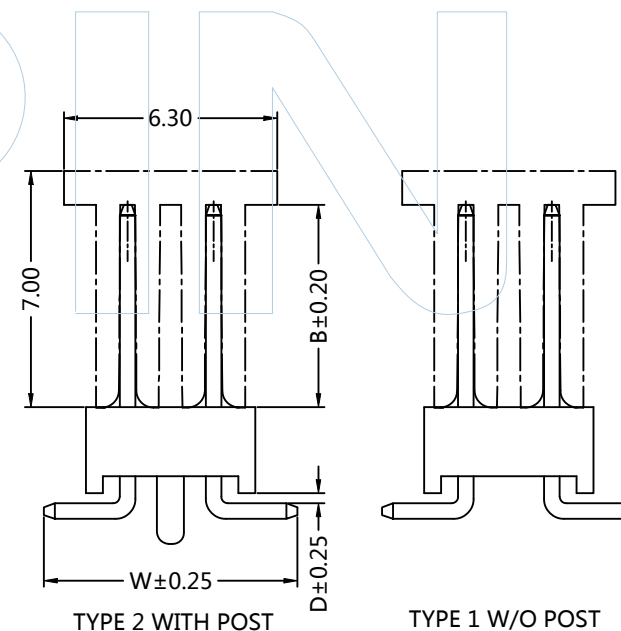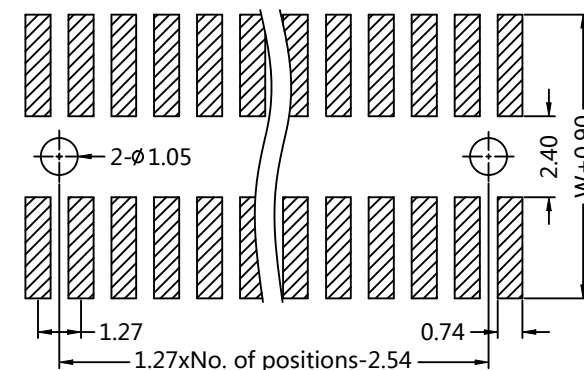

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: PHDM25-12XXXXXXXXXXXX

TITLE: PH 1.27x2.54mm Dual ROW 180°SMT H=2.50mm

NOTES:

Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass Contact Plating:Au or Sn over Ni Insulator Material:PA9T/PA6T+30%GF (UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

S						
	A0	2015/06/25	NEW	Huan.Tan	_____	Huan.Tan
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE