




PART NUMBER CODING

No. of Pins 01-50	Contact Plating	Insulator Material/Colour	Pin length(short) $L = B + H - 0.3$ $+ (W - 1.2) / 2$	Packing	Series
G0:Gold Flash	G1:3U" Gold	B:PA9T/Black		A=Tray	1=TYPI
G2:5U" Gold	G3:10U" Gold	C:PA6T/Black		T=Tube	2=TYPI
G4:15U" Gold	G5:20U" Gold			P=Tube+CAP	
G6:30U" Gold	S0:Gold Flash/Tin			R=Tape&Reel+CAP	
S1:3U" Gold/Tin	S2:5U" Gold/Tin				
S3:10U" Gold/Tin	S4:15U" Gold/Tin				
S5:20U" Gold/Tin	S6:30U" Gold/Tin				
SN:Tin					

Dimension antitheses list			
ITEM	B	W	H
Srandard	2.80	4.60	1.80
Alternate			

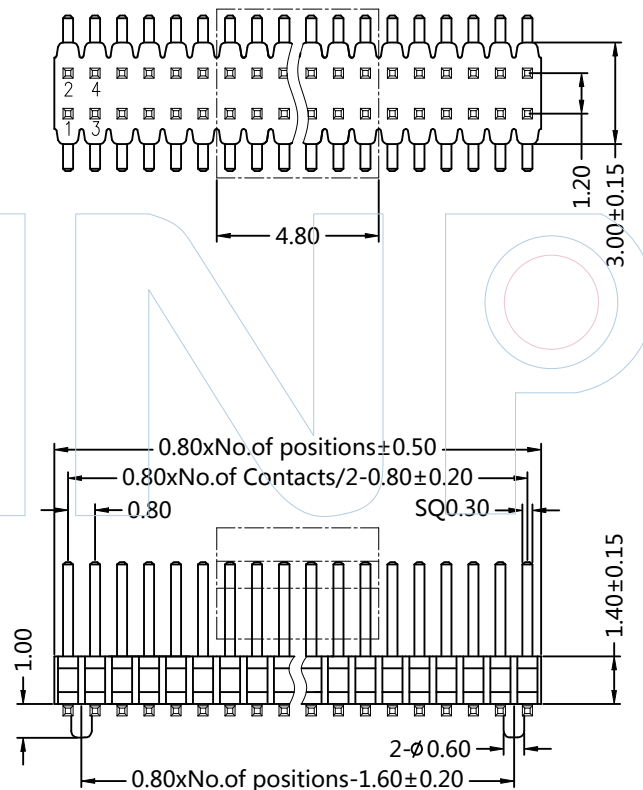

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

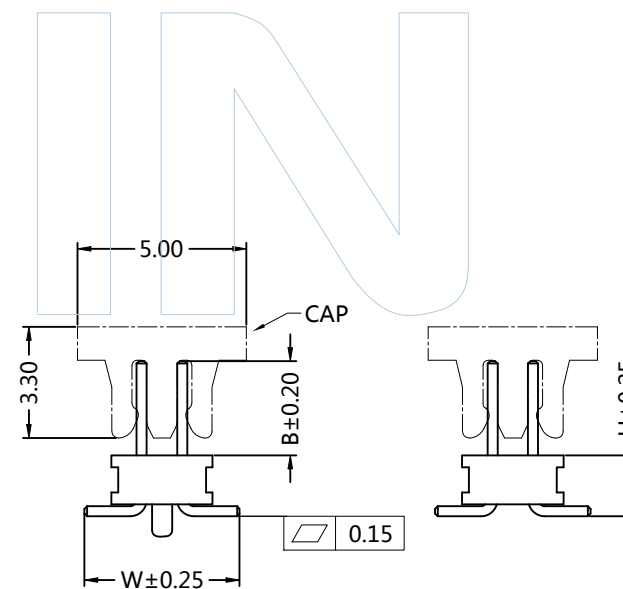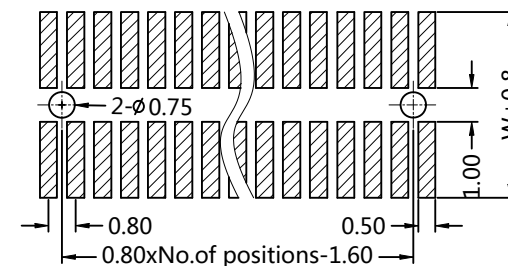

TYPE 2 WITH POST

TYPE 1 W/O POST



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: PHAM14-12XXXXXXXXXXXX

TITLE: PH 0.8x1.2mm Dual Row 180°SMT H=1.4mm

NOTES:
Current Rating:0.75AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:

DECIMALS	Angle
X.X:±0.40	± 3°
X.XX:±0.25	
X.XXX:±0.15	

SCALE	1:1	A0	2015/06/25	NEW	Huan.Tan	_____	Huan.Tan
UNIT	MM	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
PROJ.							
SHEET							