




Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ± 0.05)



PART NUMBER CODING

PHCS25-21 XX XX X XXX X X

No. of Pins
01-50

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin




Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black

Pin length
L=A+B+C

Packing
A=Tray
B=PE Bag
T=Tube

SeriesNo
1=Type1
2=Type2

Dimension antitheses list			
ITEM	A	B	C
Standard	3.00	3.00	
Alternate			

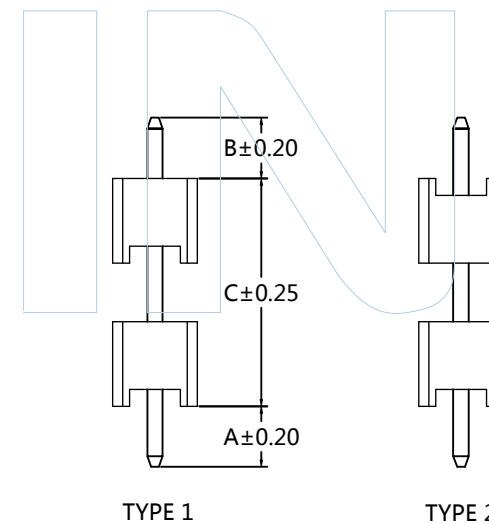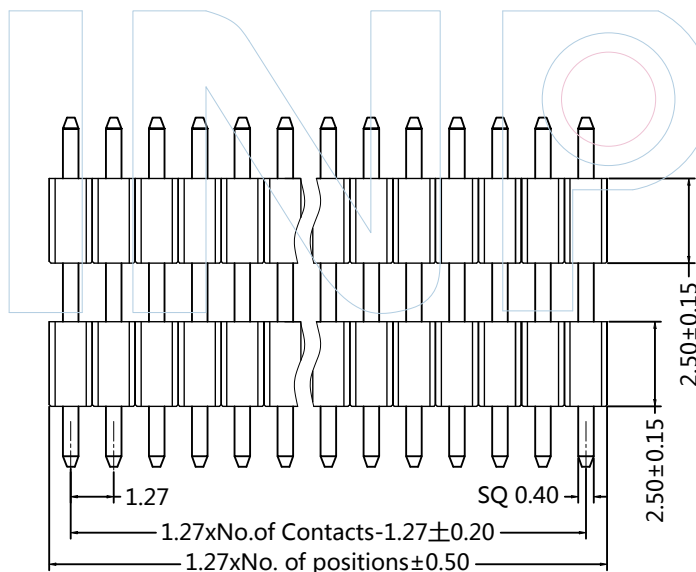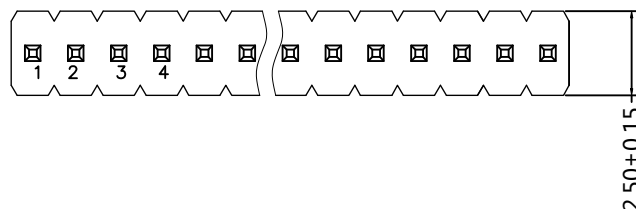

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHCS25-21XXXXXXXXXX

TITLE: PH 1.27mm Single ROW 180° H=2.5mm Double Plastic

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2021/05/21	NEW	GF.He	Andy	Bobby
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE