





PART NUMBER CODING

PHCR25-12 XX XX X XXX X 2



No. of Pins	Contact Plating	Insulator Material/Colour	Pin length(short)	Packing
01-50	G0:Gold Flash	A:PBT/Black	L=2A+2D+2.0+2.5	A=Tray
	G1:3U"Gold	C:PA9T/Black		B=PE Beg
	G2:5U"Gold	C:PA6T/Black		T=Tube
	G3:10U"Gold			
	G4:15U"Gold			
	G5:20U"Gold			
	G6:30U"Gold			
	S0:Gold Flash/Tin			
	S1:3U"Gold/Tin			
	S2:5U"Gold/Tin			
	S3:10U"Gold/Tin			
	S4:15U"Gold/Tin			
	S5:20U"Gold/Tin			
	S6:30U"Gold/Tin			
	SN:Tin			

Dimension antitheses list

ITEM	A	B	C	D
Standard	1.50	4.20	9.40	0.65
Alternate				

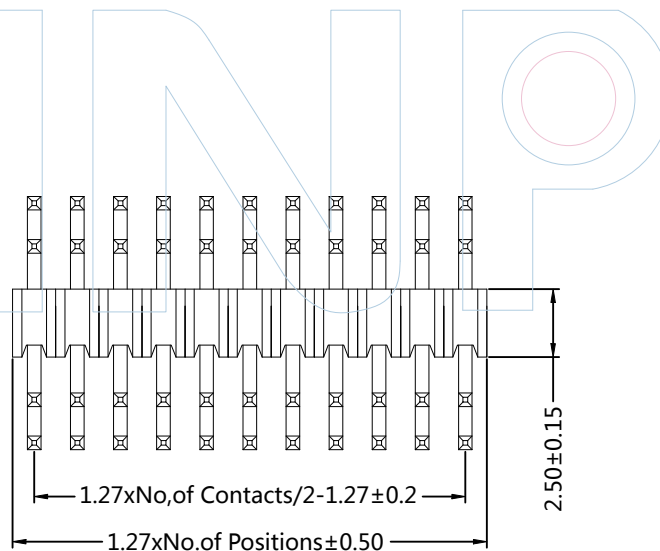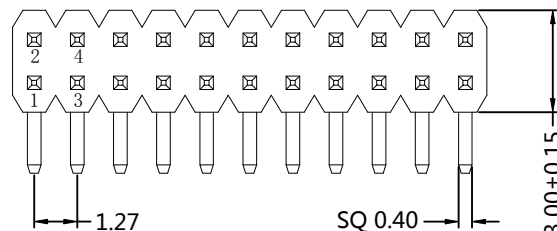

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

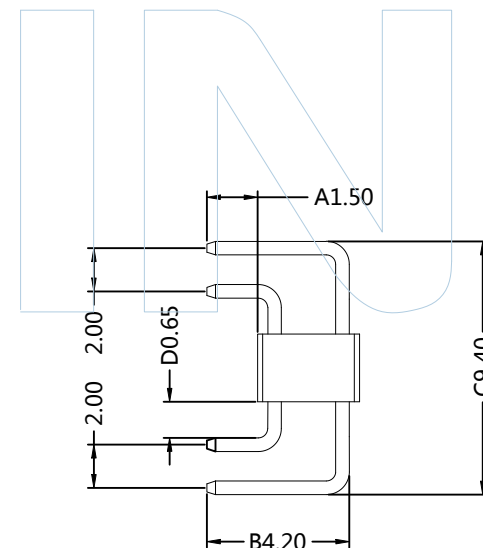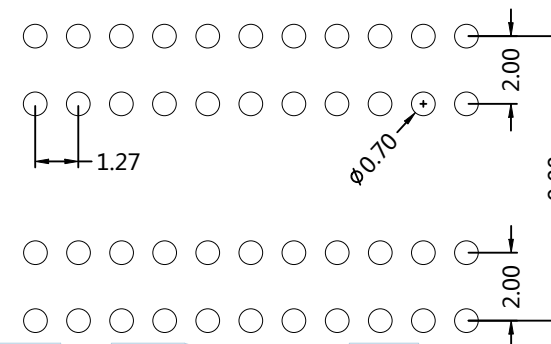

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHCR25-12XXXXXXXXXX2

TITLE: PH 1.27mm Dual ROW 90° H=2.5mm C-Type

NOTES:

Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2022/03/05	NEW	GF.He	Andy	Bobby
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE