




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



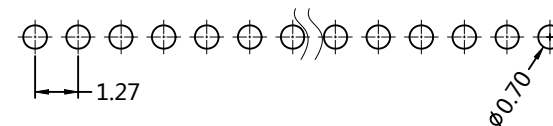


PART NUMBER CODING

PHCR25-11 XX XX X XXX X X

- No.of Pins
01-50
- Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin
- Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black
- Pin length
L=A+B+D+3.75
- Packing
A=Tray
T=Tube
- SeriesNo
1=Type1
2=Type2

Dimension antitheses list			
ITEM	A	B	D
Standard	1.80	3.00	1.00
Alternate			

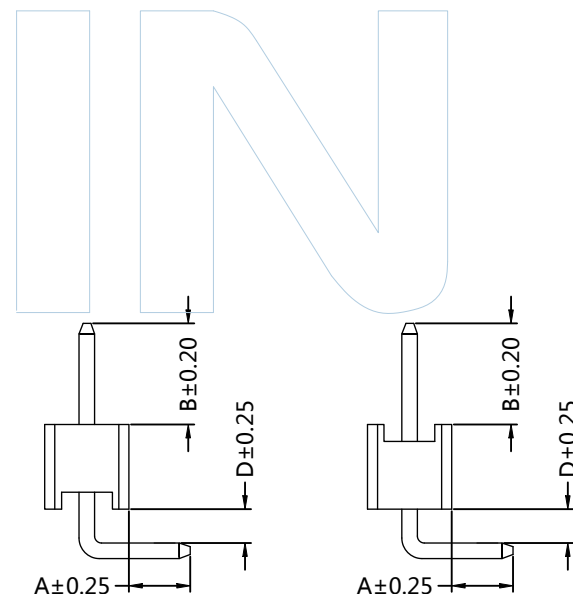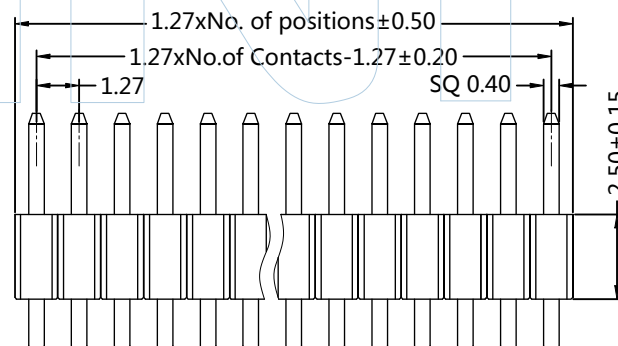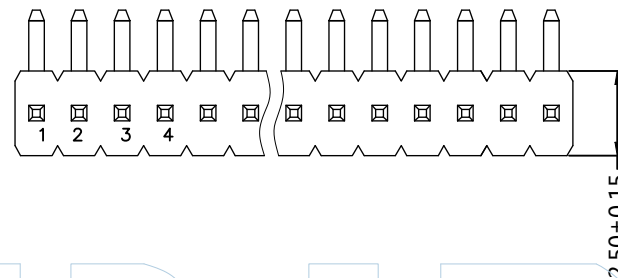

TYPE1

TYPE2



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: PHCR25-11XXXXXXXXXX

TITLE: PH 1.27mm Single ROW 90° H=2.5mm

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE