


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)





PART NUMBER CODING

PHCR17-11 XX XX X XXX X 1

No. of Pins 01-50	Contact Plating	Insulator Material/Colour	Pin length L=A+B+D +2.95	Packing A=Tray B=PE Bag T=Tube
G0:Gold Flash	G1:3U"Gold	A:PBT/Black		
G2:5U"Gold	G3:10U"Gold	B:PA9T/Black		
G4:15U"Gold	G5:20U"Gold	C:PA6T/Black		
G6:30U"Gold	G6:30U"Gold			
S0:Gold Flash/Tin	S1:3U"Gold/Tin			
S2:5U"Gold/Tin	S3:10U"Gold/Tin			
S4:15U"Gold/Tin	S5:20U"Gold/Tin			
S6:30U"Gold/Tin	S6:30U"Gold/Tin			
SN:Tin				

Dimension antitheses list			
ITEM	A	B	D
Standard	1.80	3.00	1.00
Alternate			

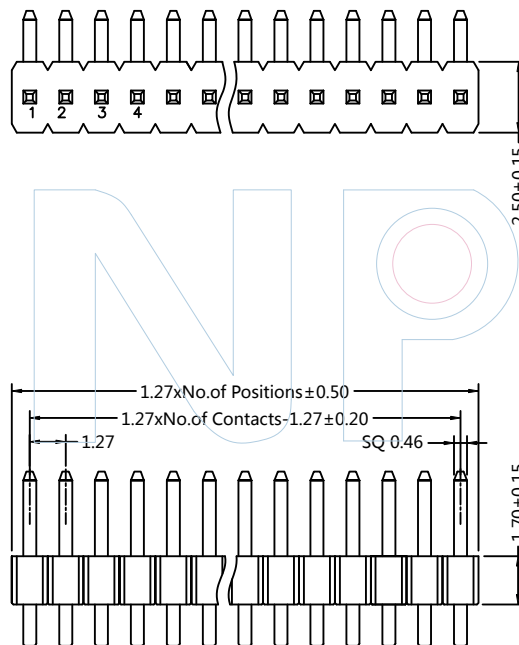

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
http://www.winpin.net

PART NO: PHCR17-11XXXXXXXXX1

TITLE: PH 1.27mm Single ROW 90° H=1.7mm

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Huan.Tan		Huan.Tan