




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

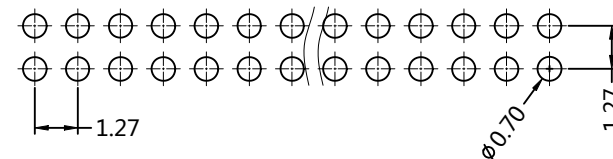

PART NUMBER CODING

PHCS15-12 XX XX X XXX X 1

No. of Pins
01-50


Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:20U" Gold
G6:30U" Gold
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:20U" Gold/Tin
S6:30U" Gold/Tin
SN:Tin

Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black

Pin length
L=A+B+1.50

Packing
A=Tray
B=PE Bag
T=Tube
R=Reel

Dimension antitheses list		
ITEM	A	B
Standard	1.80	3.00
Alternate		

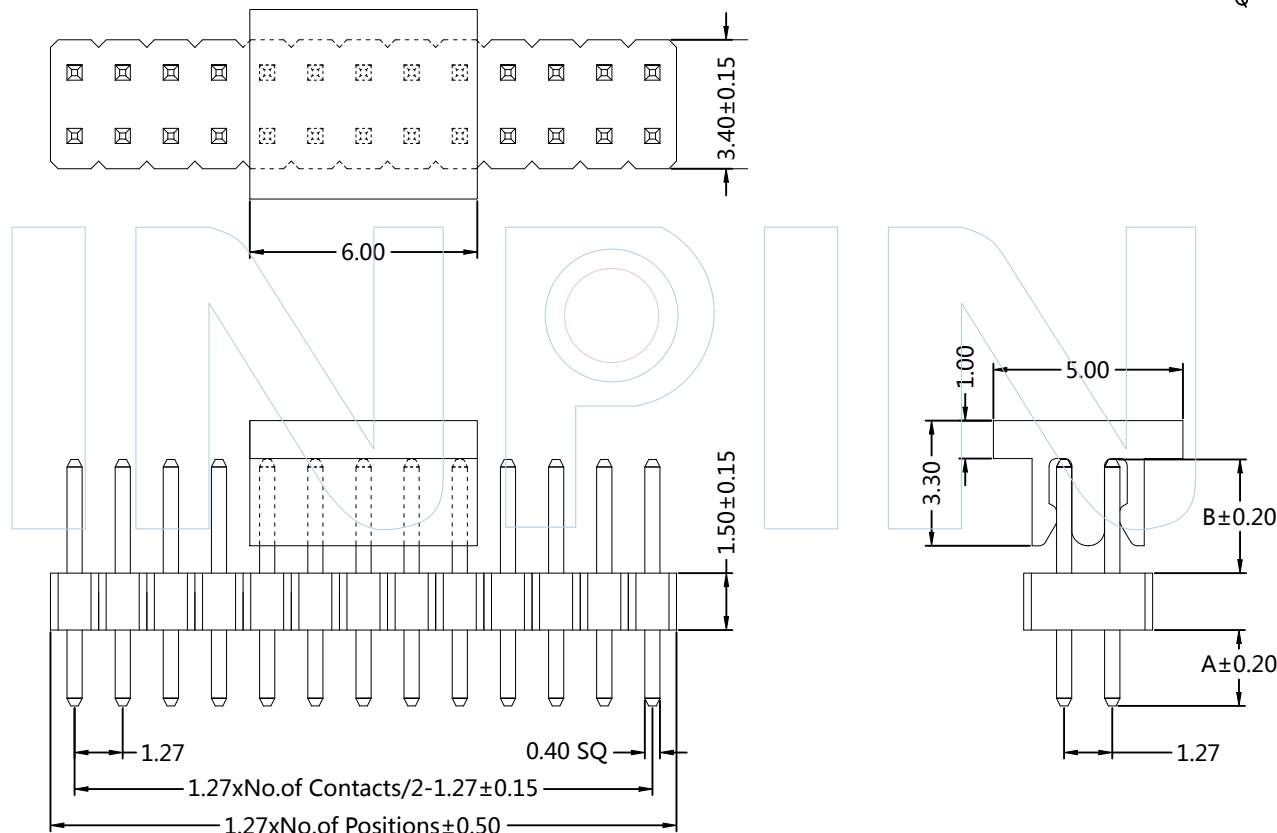

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: PHCS15-12XXXXXXXXX1

TITLE: PH 1.27mm Dual ROW 180° H=1.5mm

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE